


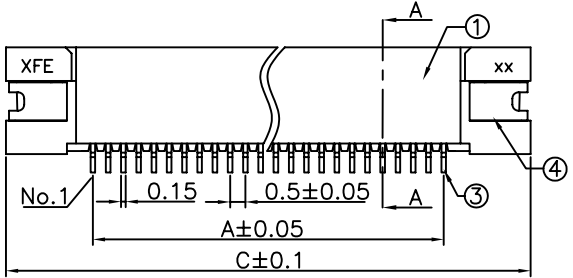




REV.	DESCRIPTION	DATE
A0	New Drawing	2009/03/25




Pin位	A	B	C	Pin位	A	B	C
4	1.5	2.6	7.3	20	9.5	10.6	15.3
6	2.5	3.6	8.3	22	10.5	11.6	16.3
8	3.5	4.6	9.3	24	11.5	12.6	17.3
10	4.5	5.6	10.3	25	12	13.1	17.8
12	5.5	6.6	11.3	26	12.5	13.6	18.3
13	6	7.1	11.8	28	13.5	14.6	19.3
14	6.5	7.6	12.3	30	14.5	15.6	20.3
15	7	8.1	12.8	32	15.5	16.6	21.3
16	7.5	8.6	13.3	33	16	17.1	21.8
18	8.5	9.6	14.3	34	16.5	17.6	22.3
19	9	10.1	14.8	36	17.5	18.6	23.3

LTR	Part Name	Material	Description	QTY
1	Housing	NY-46 UL94V-0	Initial : 500M Ohms Min. Color: Natural	1
2	Locker	PPS UL94V-0	Initial : 500M Ohms Min. Color: Brown	1
3	Contact	Phosphor Bronze	Initial : 30m Ohms Max. Tin/Lead-Plated Voltage Rating: 50V AC,DC	xx
4	Solder Tab	Phosphor Bronze	Tin/Lead-Plated	2

Temperature Rating : -20°C ~ +85°C .
Dielectric Withstanding Voltage : 500V AC/Min

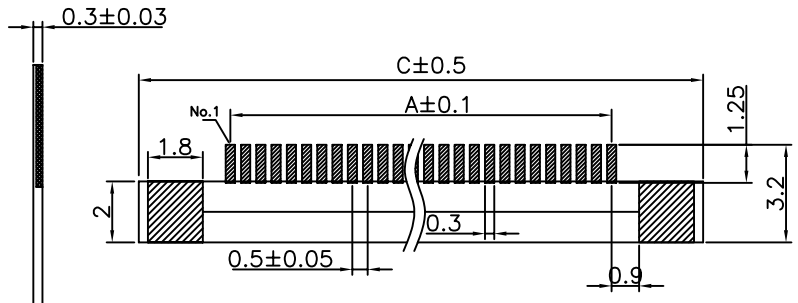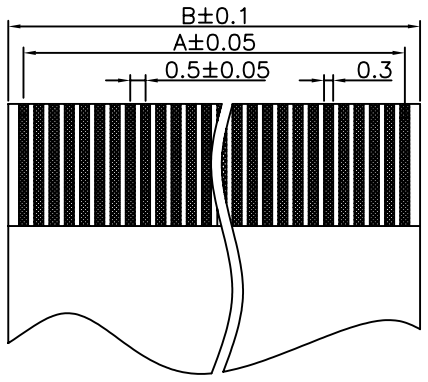

P.C.B LAYOUT

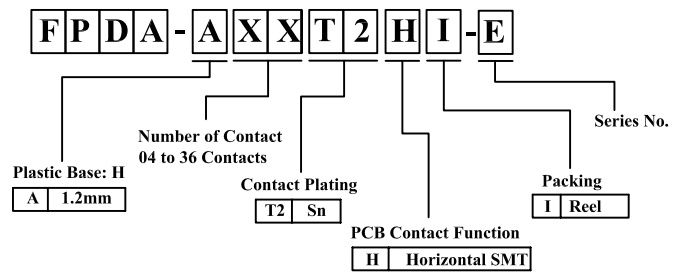

ROHS Compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE		FPC P0.5 Horizontal SMT LOWER CONTACT H1.2	
X. ± 0.5		DRAWN		DATE	
.X ± 0.3		SUNCUI		03-25-09'	
.XX ± 0.2		CHECK		DATE	
.XXX ± 0.1		APPROVED		DATE	
角度 ± 5°				NO. S005	
				PART NO. FPDA-AXXT2HI-E	
				CUSTOMER NO.	

REV.	UNIT	SCALE	
A0	mm	N/A	