


REV.	DESCRIPTION	DATE
A	New Drawing	2019/10/28

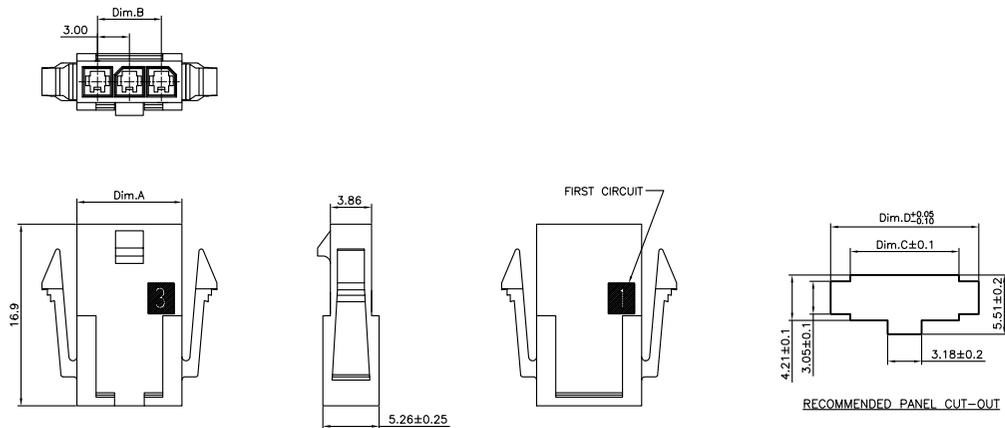

Specifications:
 Current Rating:5.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m ohm. Max.
 Insulation Resistance:1,000M ohm. Min.
 Withstanding Voltage:1,500V AC For One Minute
 Operating Temperature Range:-25°C To +105°C
 Material and Finish
 Material:Nylon 66 (UL94V-0)
 Contact:Phosphor Bronze
 Plating:Tin Plated
 Application Wire:Awg#24~#20



DIMENSION INFORMATION

POSITION	DIM. A	DIM. B	DIM. C	DIM. D
2	6.85	N/A	7.21	10.90
3	9.85	6.00	10.21	13.89
4	12.85	9.00	13.21	16.89
5	15.85	12.00	16.21	19.89
6	18.85	15.00	19.21	22.89
7	21.85	18.00	22.20	25.88
8	24.85	21.00	25.20	28.88
9	27.85	24.00	28.20	31.88
10	30.85	27.00	31.22	34.87
11	33.85	30.00	34.22	37.87
12	36.85	33.00	37.22	40.87

Housing:WRGD-H300XXXBAA-H-E1
 Housing:WRGD-H300XXXBAA-H-E2
 Terminal:CU-XXX-H-EX

Housing:WRGD-H300XXXBAA-H-F1
 Housing:WRGD-H300XXXBAA-H-F2
 Terminal:CU-XXX-H-FX

Wafer:WRGD-DSXXXT2WBLA-H
 Wafer:WRGD-DDXXXT2WBEA-H
 Wafer:WRGD-RSXXXT2NBLA-H
 Wafer:WRGD-RDXXXT2NBLA-H

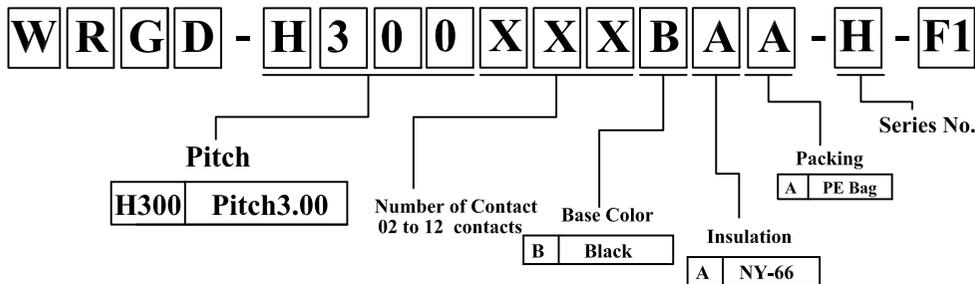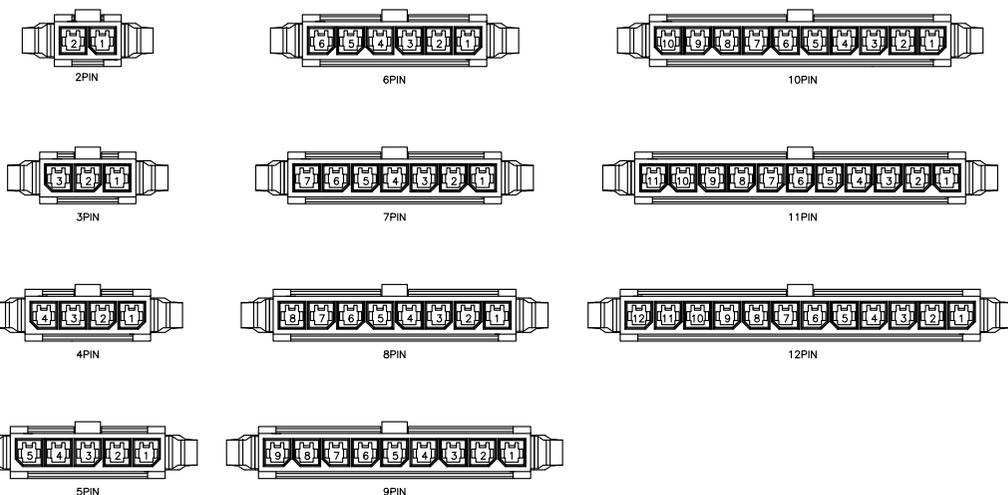

2~12PIN 引脚圖

RoHS Compliant

竣豪電子股份有限公司 Superior Tech Co., Ltd.		General Tolerance		TITLE		PH3.0 Power Plug Single Row Housing					
		X. ± 0.5		DRAWN		DATE		NO.			
REV. A		UNIT mm		SCALE 1:1		Annie		10-28-19'		T230	
		角度 ± 5°		APPROVED Tom		DATE		10-28-19'		PART NO. WRGD-H300XXXBAA-H-F1	
						DATE		10-28-19'		CUSTOMER NO.	