



REV.	DESCRIPTION	DATE
A	New Drawing	2017/07/31

Pin	A	B	C
2	1	3.06	8.2
3	2	4.06	9.2
4	3	5.06	10.2
5	4	6.06	11.2
6	5	7.06	12.2
7	6	8.06	13.2
8	7	9.06	14.2
9	8	10.06	15.2
10	9	11.06	16.2
11	10	12.06	17.2
12	11	13.06	18.2
13	12	14.06	19.2
14	13	15.06	20.2
15	14	16.06	21.2
16	15	17.06	22.2
17	16	18.06	23.2
18	17	19.06	24.2
19	18	20.06	25.2


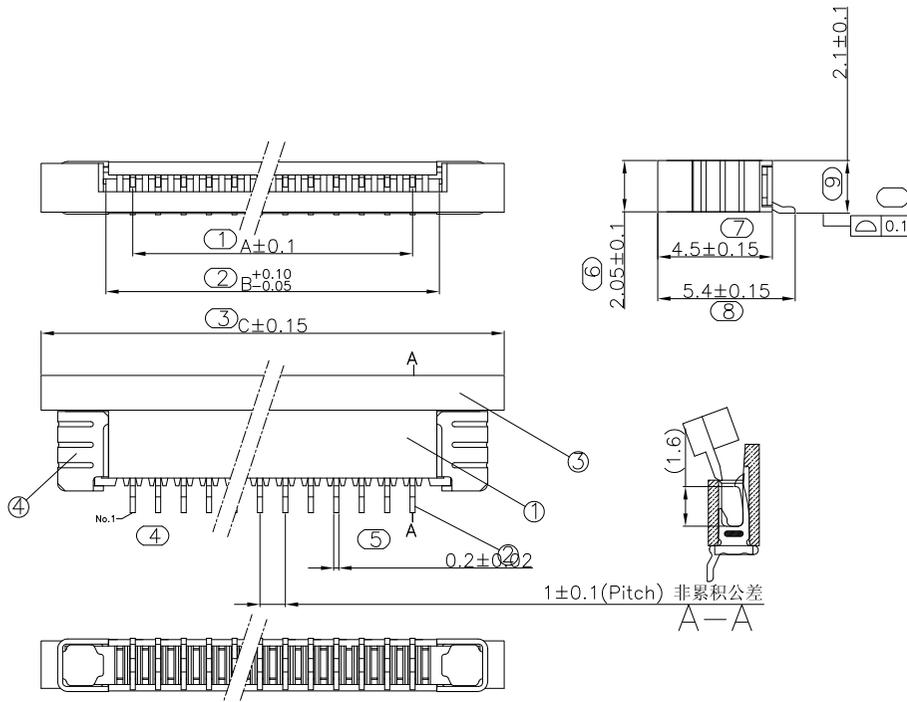


- 技术指标:
- 1、塑件表面应光洁、无毛刺、明显收缩、缺陷、裂纹等现象;
  - 2、温度范围: -25° C~85° C;
  - 3、额定电压: 50V, AC, DC(等效);
  - 4、接触电阻: ≤0.03Ω;
  - 5、绝缘电阻: ≥500MΩ;
  - 6、耐压: 500V, AC/minute.

- ROHS管理规定:
- 1、禁止使用含有ROHS指令所限制的物质。
  - 2、对应的SGS或ITS出具的ICP-AES数据、不可测定物质的成分表,有效期一年。

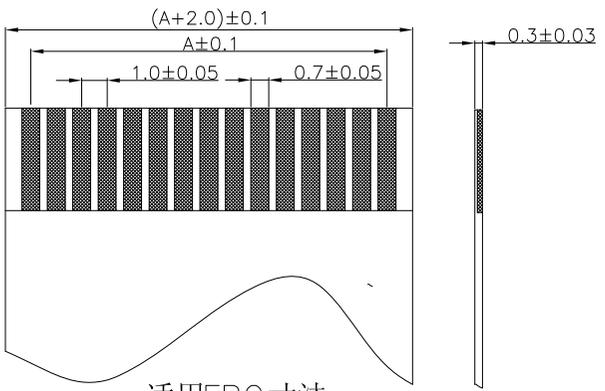

适用FPC寸法  
APPLICABLE FPC

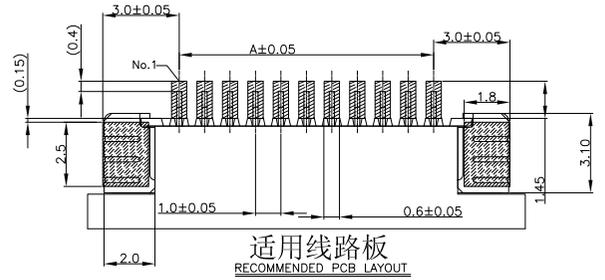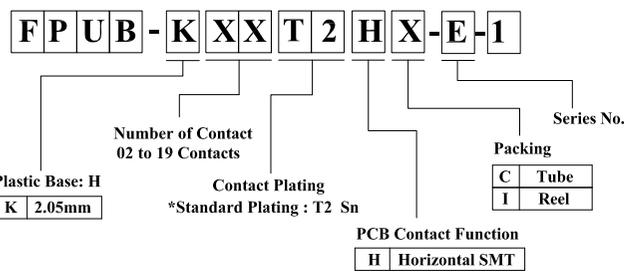

RoHS Compliant

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

General Tolerance	TITLE	FPC P1.0 Horizontal SMT UPPER CONTACT H2.05	
X. ± 0.5	DRAWN	DATE	NO.
.X ± 0.3	Andy	07-31-17'	S005
.XX ± 0.2	CHECK	DATE	PART NO.
.XXX ± 0.1	APPROVED	DATE	FPUB-KXXT2HX-E-1
角度 ± 5°			CUSTOMER NO.

REV.	UNIT	SCALE	
A	mm	1:1	