








REV.	DESCRIPTION	DATE
A	New Drawing	2019/10/23

Specifications:
 Current Rating:14.0A AC/DC
 Contact Resistance:10m ohm. max.
 Insulation Resistance:1000M ohm. min.
 Withstanding Voltage:1800V AC For One Minute
 Operating Temperature Range:-40°C ~ +125°C
 Application Wire:AWG#16 to #22



Material
 Insulator:NYLON66 (UL94V-0)
 Insulator Color:Black

Circuits	Dim.A	Dim.B
2x2	8.00	3.50
2x3	11.50	7.00
2x4	15.00	10.50
2x5	18.50	14.00
2x6	22.00	17.50
2x7	25.50	21.00
2x8	29.00	24.50

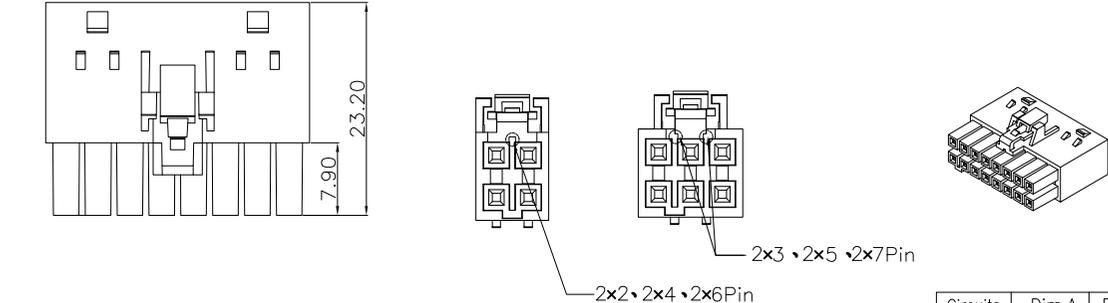

WRHD - H350XXXBAA - H - A3

2x2 PIN 2x3 PIN 2x4 PIN 2x5 PIN

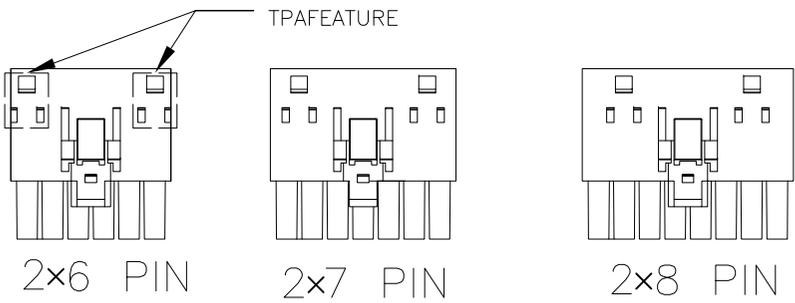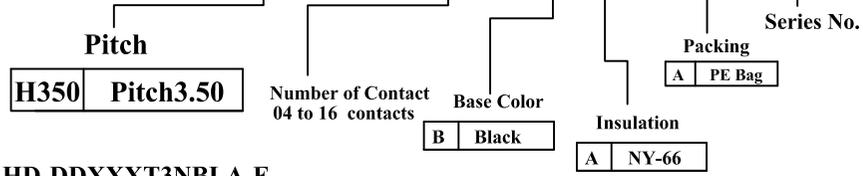

Wafer:WRHD-DDXXXT3NBLA-F
 Wafer:WRHD-RDXXXT3NBLA-F
 Housing:WRHD-H350XXXBAA-H-A3
 Terminal:CU-PXX-H-AX

RoHS compliant

竣豪電子股份有限公司 Superior Tech Co., Ltd.			General Tolerance		TITLE P3.5 Power Double Rows Housing		
			X. ± 0.5		DRAWN	DATE	NO.
REV. A UNIT mm SCALE 1:1			.X ± 0.3		Annie	10-23-19'	T230
			.XX ± 0.2		CHECK	DATE	PART NO.
			.XXX ± 0.1		Annie	10-23-19'	WRHD-H350XXXBAA-H-A3
			角度 ± 5°		APPROVED	DATE	CUSTOMER NO.
					Tom	10-23-19'	