

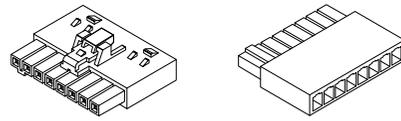
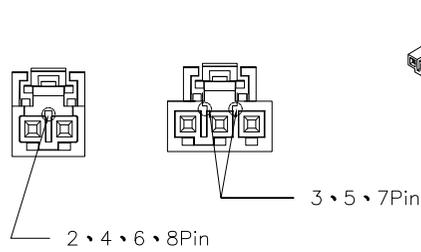
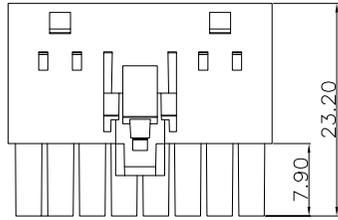


REV.	DESCRIPTION	DATE
A	New Drawing	2019/10/23




Circuits	Dim.A	Dim.B
2	8.00	3.50
3	11.50	7.00
4	15.00	10.50
5	18.50	14.00
6	22.00	17.50
7	25.50	21.00
8	29.00	24.50

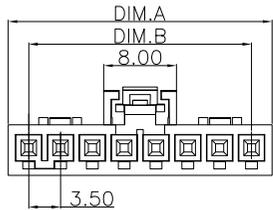


Specifications:  
 Current Rating:14.0A AC/DC  
 Contact Resistance:10m ohm. max.  
 Insulation Resistance:1000M ohm. min.  
 Withstanding Voltage:1800V AC For One Minute  
 Operating Temperature Range:-40°C ~ +125°C  
 Application Wire:AWG#16 to #22

Material  
 Insulator:NYLON66 (UL94V-0)  
 Insulator Color:Black

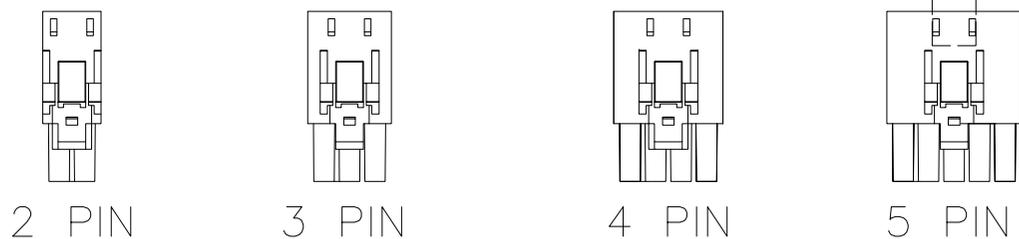


**WRHD - H350XXXBAA - H - A2**

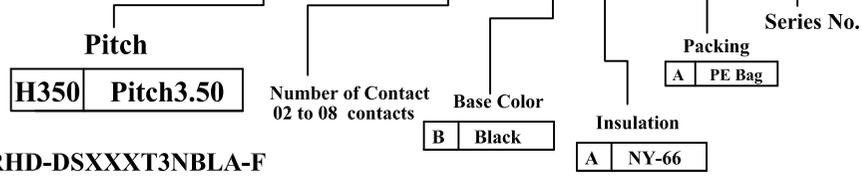

Wafer:WRHD-DSXXXT3NBLA-F  
 Wafer:WRHD-RSXXXT3NBLA-F  
 Housing:WRHD-H350XXXBAA-H-A2  
 Terminal:CU-PXX-H-AX

RoHS compliant

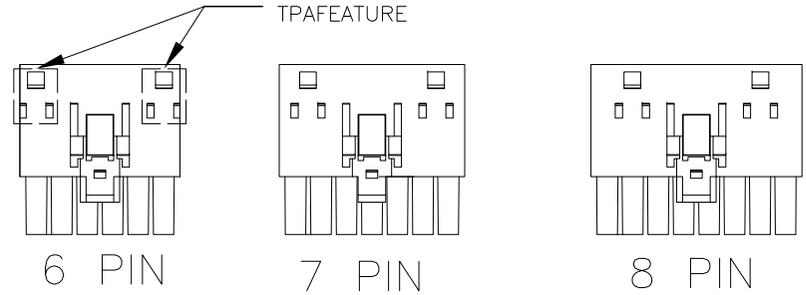

竣豪電子股份有限公司 <b>Superior Tech Co., Ltd.</b>			General Tolerance		TITLE			P3.5 Power Single Row Housing				
			X. ± 0.5		DRAWN		Annie		DATE		NO.	
			.X ± 0.3						10-23-19'		T230	
			.XX ± 0.2		CHECK		Annie		DATE		PART NO.	
			.XXX ± 0.1						10-23-19'		WRHD-H350XXXBAA-H-A2	
REV.	UNIT	SCALE	角度		APPROVED		DATE		CUSTOMER NO.			
A	mm	1:1	± 5°		Tom		10-23-19'					