

REV.	DESCRIPTION	DATE
B	更新圖面	2011/02/14
C	更新圖面	2015/10/07

NOTES:



1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
- 2) INSULATION RESISTANCE: 100MΩ MIN;
- 3) CONTACT RESISTANCE: 50mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 300V AC;
- 5) OPERATING TEMPERATURE:-55°C TO +85°C.

2. Mechanical:


- 1) Mating Force: 30N MAX
- 2) Unmating Force: 7N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

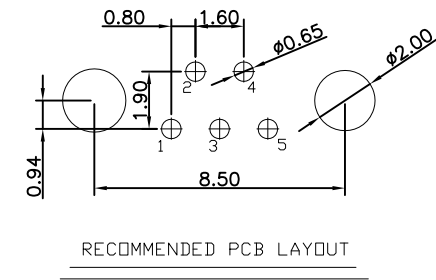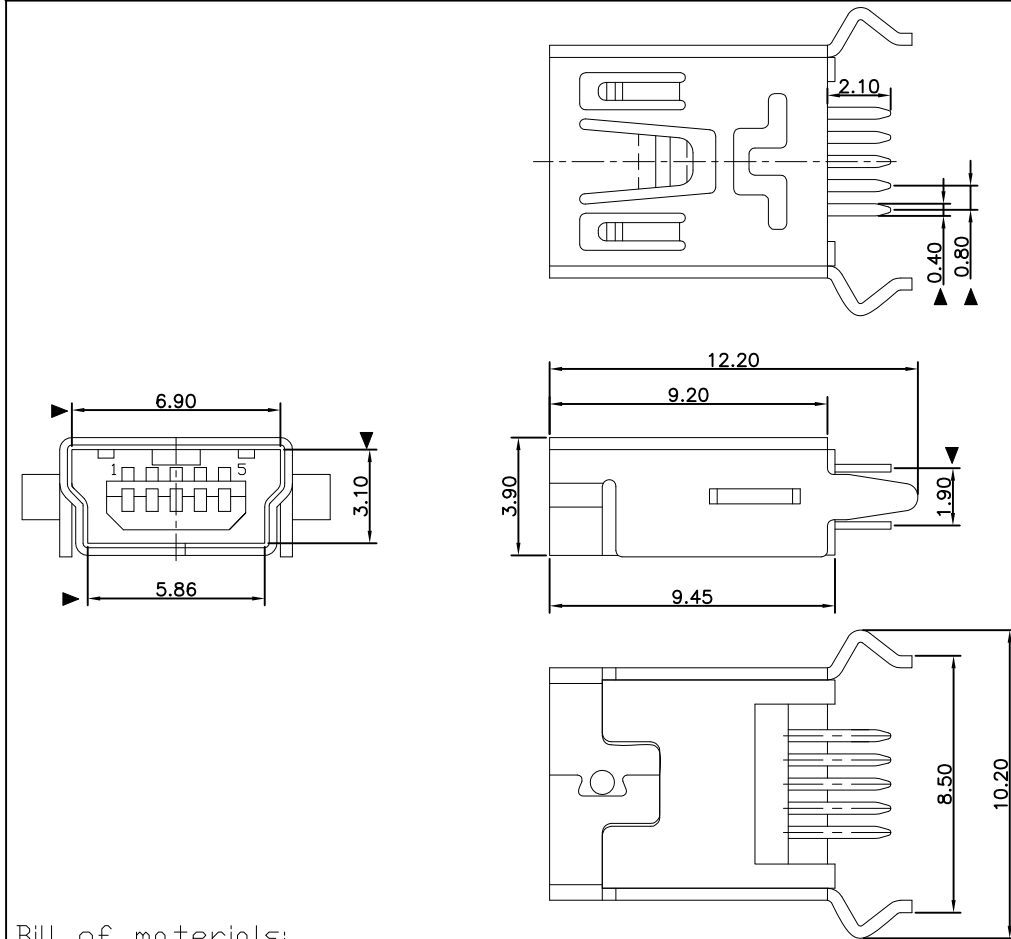

Bill of materials:

3	HOUSING	LCP	1	UL94V-0
2	SHELL	COPPER ALLOY	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN
NO	PARTS	MATERIAL	QTY	FINISHING

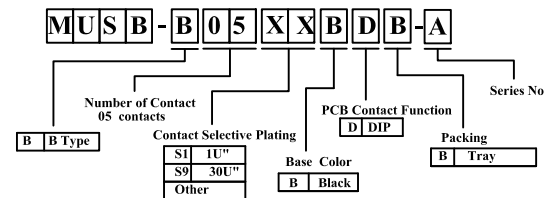


RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE	MINI USB DIP 5Pin	
X.	± 0.5	DRAWN	DATE	NO.
.X	± 0.3	Zhanghoglan	2015-10-07	T006
.XX	± 0.2	CHECK	DATE	PART NO.
.XXX	± 0.1	APPROVED	DATE	MUSB-B05XXBDB-A
角度	± 5°			CUSTOMER NO.


REV.	UNIT	SCALE	
C	mm	4:1	

REV.	DESCRIPTION	DATE
B	更新圖面	2011/02/14
C	更新圖面	2015/10/07

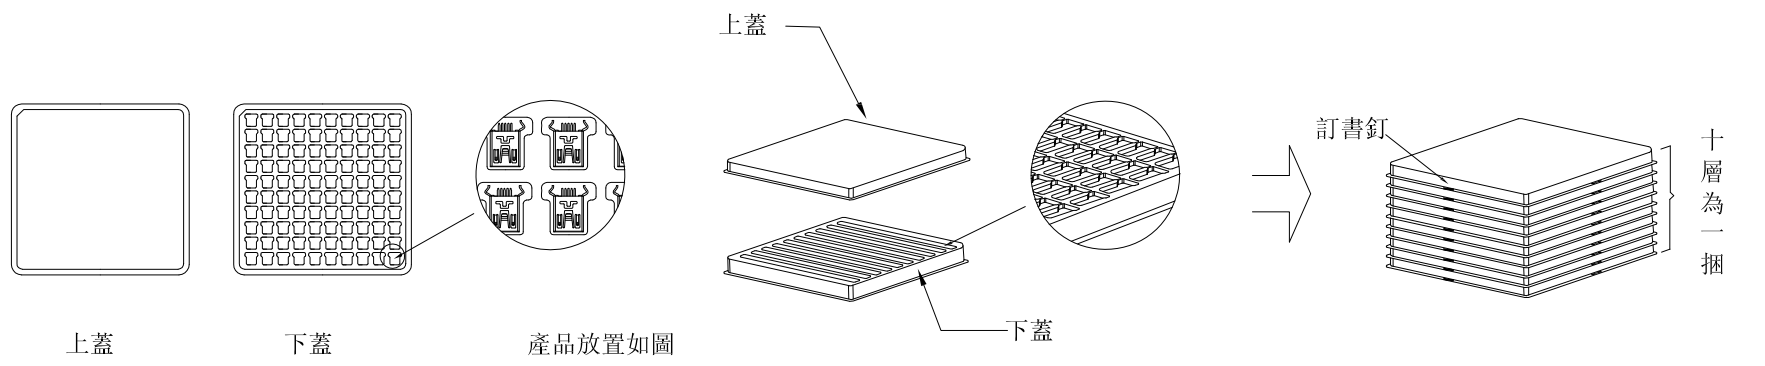

① 真空盒

② 100PCS/盒

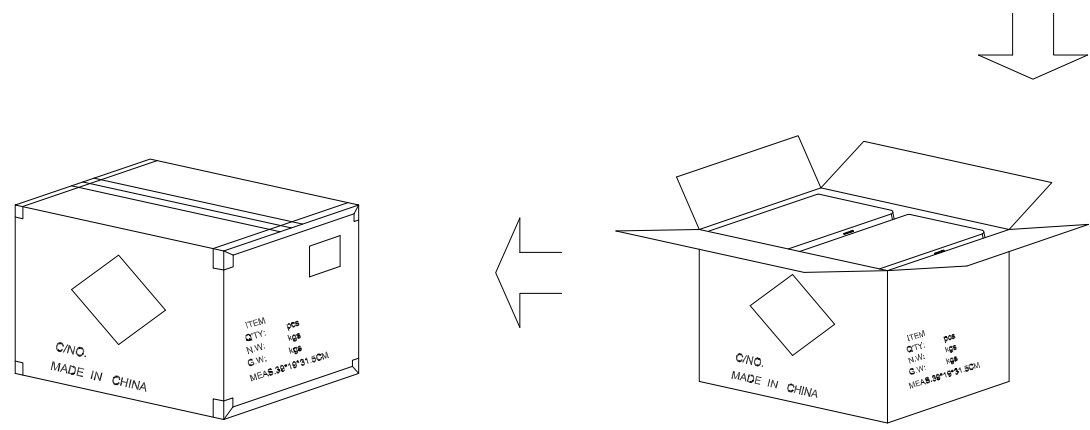

③ 封箱

③ 100盒/箱

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE	MINI USB DIP 5Pin 包裝圖	
X. ± 0.5		DRAWN	DATE	NO.
.X ± 0.3		Zhanghoglan	2015-10-07	T006
.XX ± 0.2		CHECK	DATE	PART NO.
.XXX ± 0.1		APPROVED	DATE	MUSB-B05XXBDB-A
角度	± 5°			CUSTOMER NO.

REV.	UNIT	SCALE	
C	mm	4:1	