
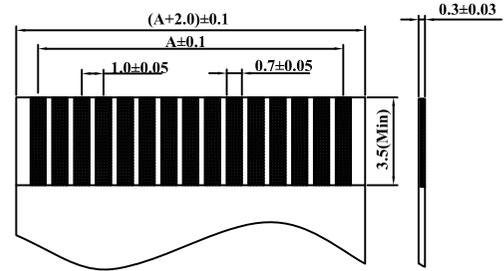





REV.	DESCRIPTION	DATE
A	New Drawing	2011/10/19
B	New Drawing	2017/07/25
C	圖面更新	2023/04/28

1. OPERATING TEMPERATURE: -25~85°C
2. OPERATING VOLTAGE: 125V AC/DC
3. CURRENT RATING: 1.0 AMPS
4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/Minute;
5. INSULATION RESISTANCE: 500MΩ Min;
6. CONTACT RESISTANCE: 0.03Ω Max;

序号	名称	材料	数量	附注
4	插針 Fitting Nail	磷青銅 Phosphor Bronze	2	电镀(镍): 至少表面镀层30u*MIN, 厚镀层 80u*MIN.
3	驱动 Actuator	LCP (UL94V-0)	1	磷
2	端子 Contact	磷青銅 Phosphor Bronze	n×1	电镀(镍): 至少表面镀层30u*MIN, 厚镀层 80u*MIN.
1	插座 Housing	LCP (UL94V-0)	1	磷

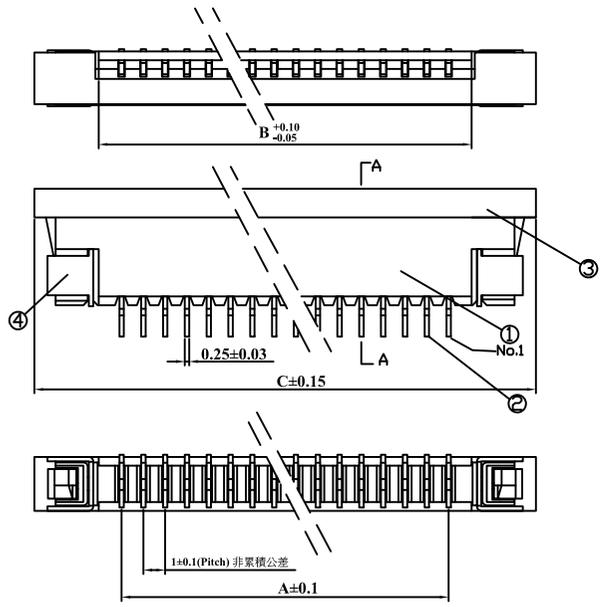

APPLICABLE FPC

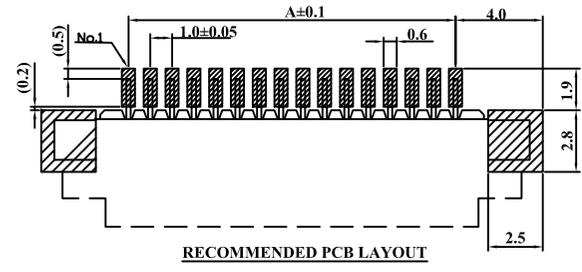

FPDB-HXXT2HX-E

Number of Contact: 04 to 40 Contacts

Plastic Base: H
H 2.45mm

Contact Plating
*Standard Plating : T2 Sn

Packing
C Tube
I Reel

PCB Contact Function
H Horizontal SMT

Series No.

RoHS compliant

No. of Contacts	DIM A	DIM B	DIM C	No. of Contacts	DIM A	DIM B	DIM C
4	3	5.06	11	24	23	25.06	31
5	4	6.06	12	25	24	26.06	32
6	5	7.06	13	26	25	27.06	33
7	6	8.06	14	27	26	28.06	34
8	7	9.06	15	28	27	29.06	35
9	8	10.06	16	29	28	30.06	36
10	9	11.06	17	30	29	31.06	37
11	10	12.06	18	31	30	32.06	38
12	11	13.06	19	32	31	33.06	39
13	12	14.06	20	33	32	34.06	40
14	13	15.06	21	34	33	35.06	41
15	14	16.06	22	35	34	36.06	42
16	15	17.06	23	36	35	37.06	43
17	16	18.06	24	37	36	38.06	44
18	17	19.06	25	38	37	39.06	45
19	18	20.06	26	39	38	40.06	46
20	19	21.06	27	40	39	41.06	47
21	20	22.06	28				
22	21	23.06	29				
23	22	24.06	30				

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance	TITLE	FPC P1.0 Horizontal SMT LOWER CONTACT H2.45	
X. ± 0.5	DRAWN	DATE	NO.
.X ± 0.3	Jacky	04-28-23'	S005
.XX ± 0.2	CHECK	DATE	PART NO.
.XXX ± 0.1	Tom	04-28-23'	FPDB-HXXT2HX-E
角度 ± 5°	APPROVED	DATE	CUSTOMER NO.
	Tom	04-28-23'	

REV.	UNIT	SCALE	
C	mm	1:1	