

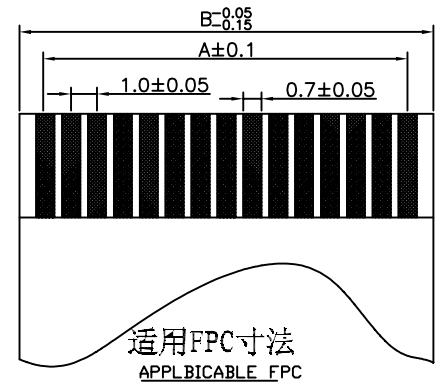

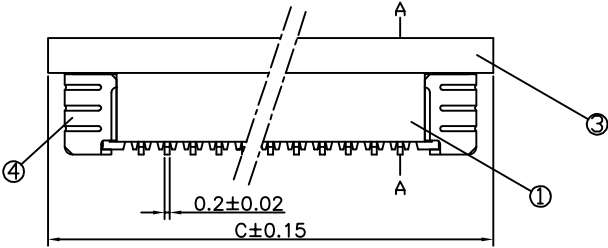




REV.	DESCRIPTION	DATE
A	New Drawing	2008/11/14
B	設變PIN位	2012/03/28

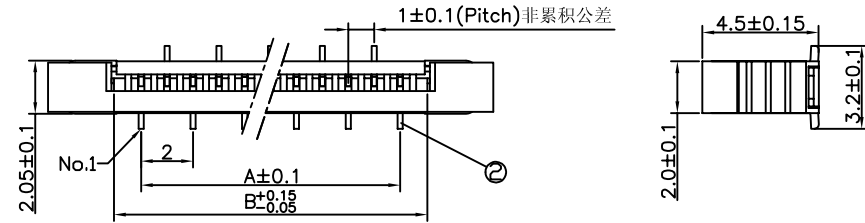



技術指標

- 1、塑件表面應光潔、無毛刺、明顯收縮缺陷、裂紋等現象；
- 3、溫度範圍：-25° C~85° C；
- 4、額定電壓：50V, AC, DC; (等效)
- 5、接觸電阻：≤0.03Ω；
- 6、絕緣電阻：≥500MΩ；
- 7、耐壓：500V, AC/minute.

1. 禁止使用含有ROHS指令所限制的物質。
2. 對應的SGS或ITS出具的ICP-AES數據、不可測定物質的成份表，有效期一年。

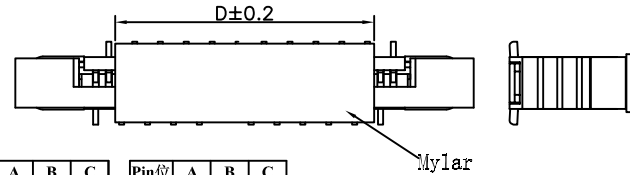

Pin位	A	B	C	Pin位	A	B	C
4	3	5.1	10.2	12	11	13.1	18.2
5	4	6.1	11.2	13	12	14.1	19.2
6	5	7.1	12.2	14	13	15.1	20.2
7	6	8.1	13.2	15	14	16.1	21.2
8	7	9.1	14.2	16	15	17.1	22.2
9	8	10.1	15.2	17	16	18.1	23.2
10	9	11.1	16.2	18	17	19.1	24.2
11	10	12.1	17.2	19	18	20.1	25.2

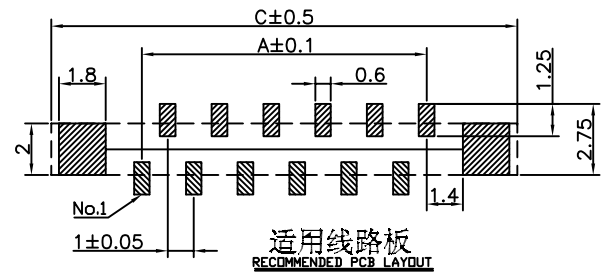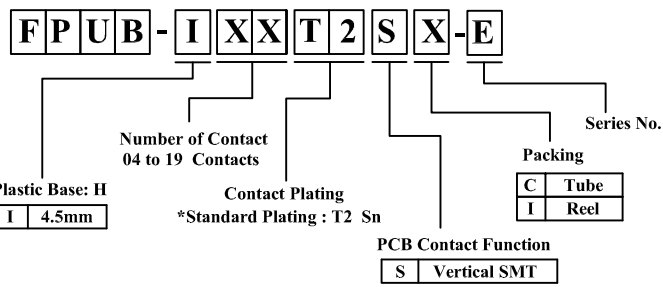

RoHS Compliant

序号	名称	材料	数量	备注
4	焊片 Fitting Nail	磷青铜 Phosphor Bronze	2	电镀(锡): 整个表面镀层≥30u"MIN, 厚度≥ 80u"MIN.
3	铆扣 Actuator	LCPI(UL94V-0)	1	颜色/着色
2	端子 Contact	磷青铜 Phosphor Bronze	n×1	电镀(锡): 整个表面镀层≥30u"MIN, 厚度≥ 2u".
1	基座 Housing	PA46/LCPI(UL94V-0)	1	无色

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

General Tolerance	TITLE	FPC P1.0 Vertical SMT UPPER CONTACT H4.5		
X. ± 0.5	DRAWN	DATE	NO.	
.X ± 0.3	YuHongYu	03-28-12'	S005	
.XX ± 0.2	CHECK	DATE	PART NO.	
.XXX ± 0.1	APPROVED	DATE	FPUB-IXXT2HX-E	
角度 ± 5°			CUSTOMER NO.	

REV.	UNIT	SCALE	
B	mm	1:1	