






REV.	DESCRIPTION	DATE
A	New Drawing	2020/5/20




NOTES:

SPECIFICATION:

- CURRENT RATING: 5.0A MAX
- VOLTAGE: 100 VAC
- TEMPERATURE RANGE: -30 °C ~ 85 °C
- CONTACT RESISTANCE: 40 MILLIONHM MAX
- INSULATION RESISTANCE: 100 MEGOHMS MIN.
- INSERTION FORCE : 5N~20N
- UNMATING FORCE: 8N~20N
- DURABILITY: 10000 CYCLES



A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

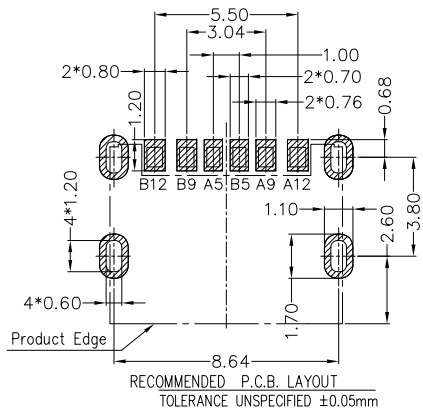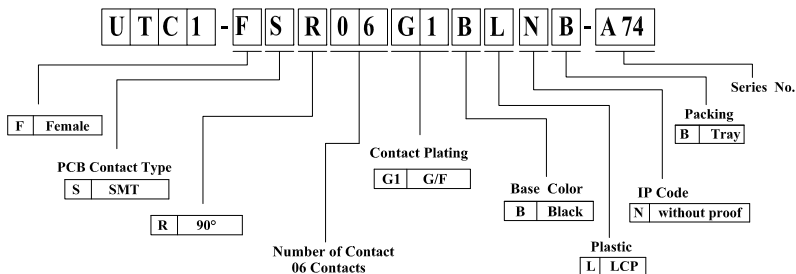

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
3	SHELL	STAINLESS STEEL	Ni:50u" Plated	1SET
2	CONTACT	COPPER ALLOY	Au1u"/Ni:50u" Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS

RoHS compliant

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

General Tolerance	TITLE	USB Type C Female SMT 90° 6P 腳長2.00	
X. ± 0.5	DRAWN	DATE	NO.
.X ± 0.3	Annie	05-20-20'	S054
.XX ± 0.2	CHECK	DATE	PART NO.
.XXX ± 0.1	Annie	05-20-20'	UTC1-FSR06G1BLNB-A74
角度 ± 5°	APPROVED	DATE	CUSTOMER NO.
	Tom	05-20-20'	

REV.	UNIT	SCALE
A	mm	1:1

