







REV.	DESCRIPTION	DATE
A	New Drawing	2019/10/23

Specifications:
 Current Rating:14.0A AC/DC
 Voltage Rating:400V AC/DC
 Contact Resistance:10m ohm. max.
 Insulation Resistance:1000M ohm. min.
 Withstanding Voltage:1800V AC For One Minute
 Operating Temperature Range:-40°C ~ +120°C

Material
 Insulator:LCP (UL94V-0)
 Insulator Color:Black
 Contact:Brass
 Plating:Matte Tin plated
Wafer:WRHD-RSXXXT3NBLA-F
Housing:WRHD-H350XXXBAA-H-A2
Terminal:CU-PXX-H-AX

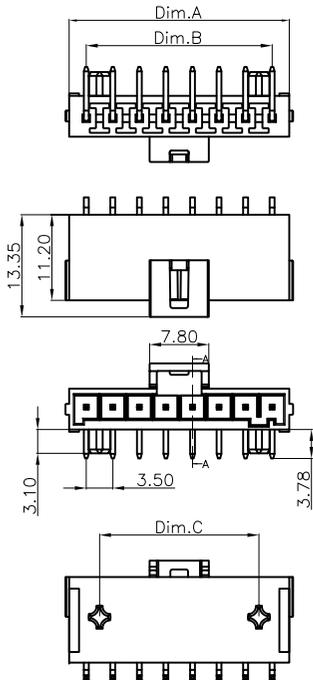

Circuits	DIM A	DIM B	Dim C
2	8.00	3.50	0.00
3	11.50	7.00	0.00
4	15.00	10.50	7.00
5	18.50	14.00	10.50
6	22.00	17.50	14.00
7	25.50	21.00	17.50
8	29.00	24.50	21.00

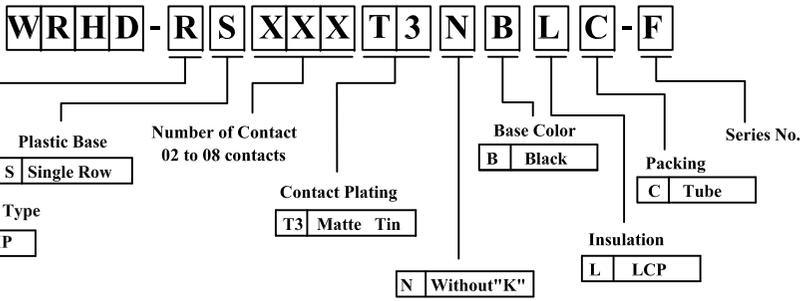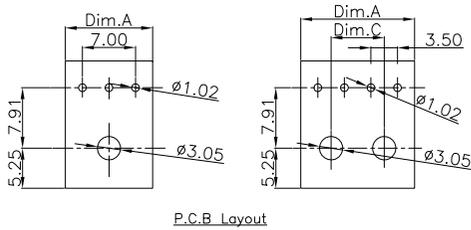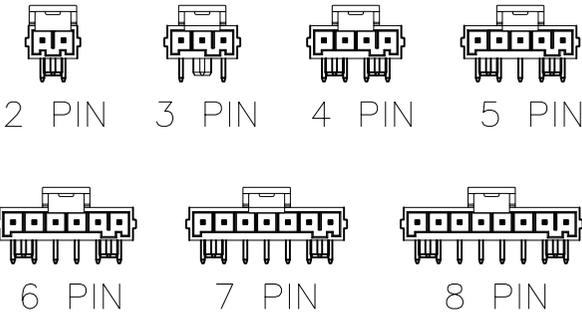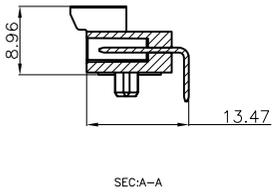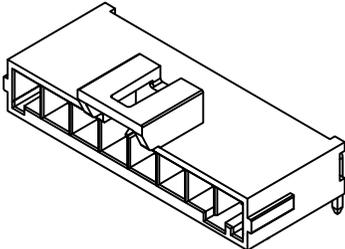

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE		PH3.5 Power Wafer Single Row 90° Dip Type	
X. ± 0.5	DRAWN	Annie	DATE	NO.	
.X ± 0.3			10-23-19'	T230	
.XX ± 0.2	CHECK	Annie	DATE	PART NO.	
.XXX ± 0.1			10-23-19'	WRHD-RSXXXT3NBLA-F	
角度 ± 5°	APPROVED	Tom	DATE	CUSTOMER NO.	
			10-23-19'		

REV.	UNIT	SCALE	
A	mm	1:1	