

REV.	DESCRIPTION	DATE
A	New Drawing	2019/10/23

Specifications:

Current Rating:14.0A AC/DC
Voltage Rating:400V AC/DC
Contact Resistance:10m ohm. max.
Insulation Resistance:1000M ohm. min.
Withstanding Voltage:1800V AC For One Minute
Operating Temperature Range:-40°C ~ +120°C



Material

Insulator:LCP (UL94V-0)
Insulator Color:Black
Contact:Brass
Plating:Matte Tin plated





Wafer:WRHD-RDXXXT3NBLA-F

Housing:WRHD-H350XXXBAA-H-A3



Terminal:CU-PXX-H-AX



Circuits	DIM A	DIM B	Dim C
4	8.00	3.50	0.00
6	11.50	7.00	0.00
8	15.00	10.50	7.00
10	18.50	14.00	10.50
12	22.00	17.50	14.00
14	25.50	21.00	17.50
16	29.00	24.50	21.00


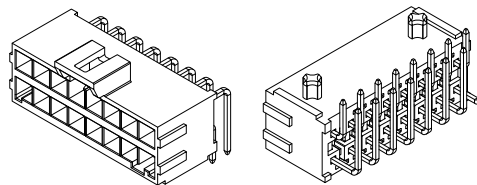


2x2 PIN 2x3 PIN 2x4 PIN 2x5 PIN



2x6 PIN 2x7 PIN 2x8 PIN

WRHD-RDXXXT3NBLC-F

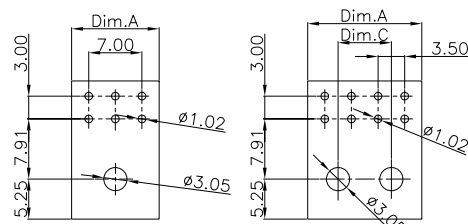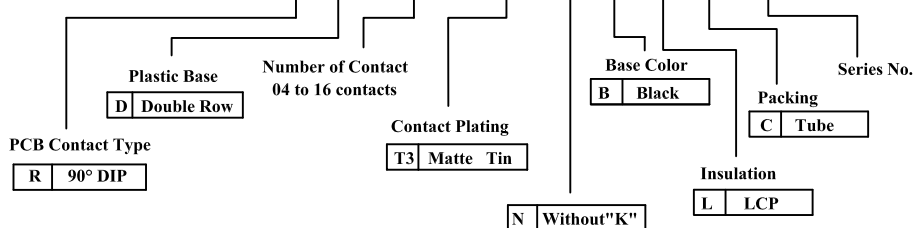

P.C.B Layout

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE		PH3.5 Power Wafer R/A Double Row Dip Type	
X. ± 0.5	DRAWN	Annie	DATE	10-23-19'	NO.
.X ± 0.3					
.XX ± 0.2	CHECK	Annie	DATE	10-23-19'	PART NO.
.XXX ± 0.1					
角度 ± 5°	APPROVED	Tom	DATE	10-23-19'	CUSTOMER NO.

REV.	UNIT	SCALE
A	mm	1:1

