


REV.	DESCRIPTION	DATE
A	New Drawing	2019/10/23



Specifications:  
 Current Rating:14.0A AC/DC  
 Voltage Rating:400V AC/DC  
 Contact Resistance:10m ohm. max.  
 Insulation Resistance:1000M ohm. min.  
 Withstanding Voltage:1800V AC For One Minute  
 Operating Temperature Range:-40°C ~ +120°C

Material  
 Insulator:LCP (UL94V-0)  
 Insulator Color:Black  
 Contact:Brass  
 Plating:Matte Tin plated


Wafer:WRHD-DDXXXT3NBLA-F  
 Housing:WRHD-H350XXXBAA-H-A3  
 Terminal:CU-PXX-H-AX

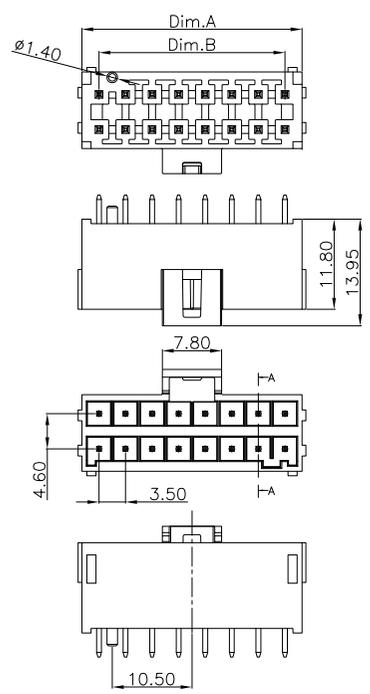

Circuits	DIM A	DIM B
4	8.00	3.50
6	11.50	7.00
8	15.00	10.50
10	18.50	14.00
12	22.00	17.50
14	25.50	21.00
16	29.00	24.50


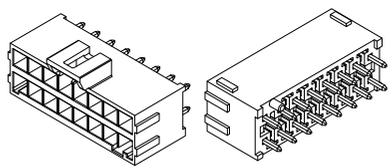


2x2 PIN 2x3 PIN 2x4 PIN 2x5 PIN



2x6 PIN 2x7 PIN 2x8 PIN

WRHD-DDXXXT3NBLC-F

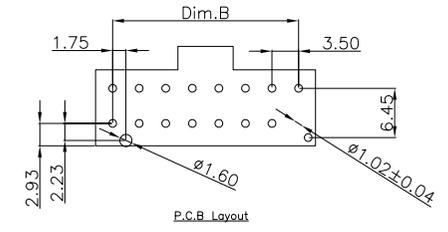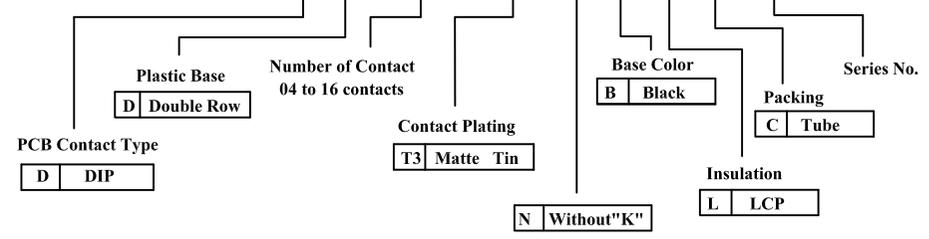

RoHS compliant

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

General Tolerance		TITLE		PH3.5 Power Wafer Double Row Dip Type	
X. ± 0.5	DRAWN	Annie	DATE	NO.	
.X ± 0.3			10-23-19'	T230	
.XX ± 0.2	CHECK	Annie	DATE	PART NO.	
.XXX ± 0.1			10-23-19'	WRHD-DDXXXT3NBLC-F	
角度 ± 5°	APPROVED	Tom	DATE	CUSTOMER NO.	
			10-23-19'		

REV.	UNIT	SCALE	
A	mm	1:1	