
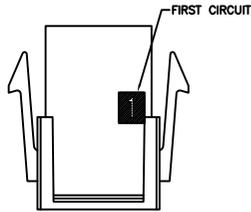

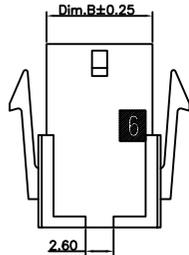



REV.	DESCRIPTION	DATE
A	New Drawing	2019/10/28



Housing:WRGD-H300XXXBAA-H-E1
Housing:WRGD-H300XXXBAA-H-E2
Terminal:CU-XXX-H-EX


Housing:WRGD-H300XXXBAA-H-F1
Housing:WRGD-H300XXXBAA-H-F2
Terminal:CU-XXX-H-FX

Wafer:WRGD-DSXXXT2WBLA-H
Wafer:WRGD-DDXXXT2WBEA-H
Wafer:WRGD-RSXXXT2NBLA-H
Wafer:WRGD-RDXXXXT2NBLA-H

Specifications:
Current Rating:5.0A AC/DC
Voltage Rating:250V AC/DC
Contact Resistance:10m ohm. Max.
Insulation Resistance:1,000M ohm. Min.
Withstanding Voltage:1,500V AC For One Minute
Operating Temperature Range:-25°C To +105°C
Material and Finish
Material:High Temp. Plastic(UL94V-0)
Contact:Phosphor Bronze
Plating:Tin Plated
Application Wire:Awg#24~#20

Dimension Information:

Circuits	Dim.A	Dim.B	Dim.C	Dim.D
2		3.85	4.21	7.90
4	3.00	6.85	7.21	10.90
6	6.00	9.85	10.21	13.89
8	9.00	12.85	13.21	16.89
10	12.00	15.85	16.21	19.89
12	15.00	18.85	19.21	22.89
14	18.00	21.82	22.21	25.88
16	21.00	24.85	25.21	28.88
18	24.00	27.85	28.21	31.88
20	27.00	30.85	31.21	34.87
22	30.00	33.85	34.21	37.87
24	33.00	36.85	37.21	40.87

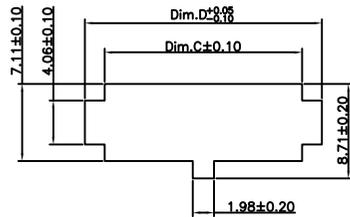

RECOMMENDED PANEL CUT-OUT

WRGD - H300XXXBAA - H - F2

Pitch
H300 Pitch3.00


Number of Contact
02 to 24 contacts

Base Color
B Black

Insulation
A NY-66

Packing
A PE Bag

Series No.

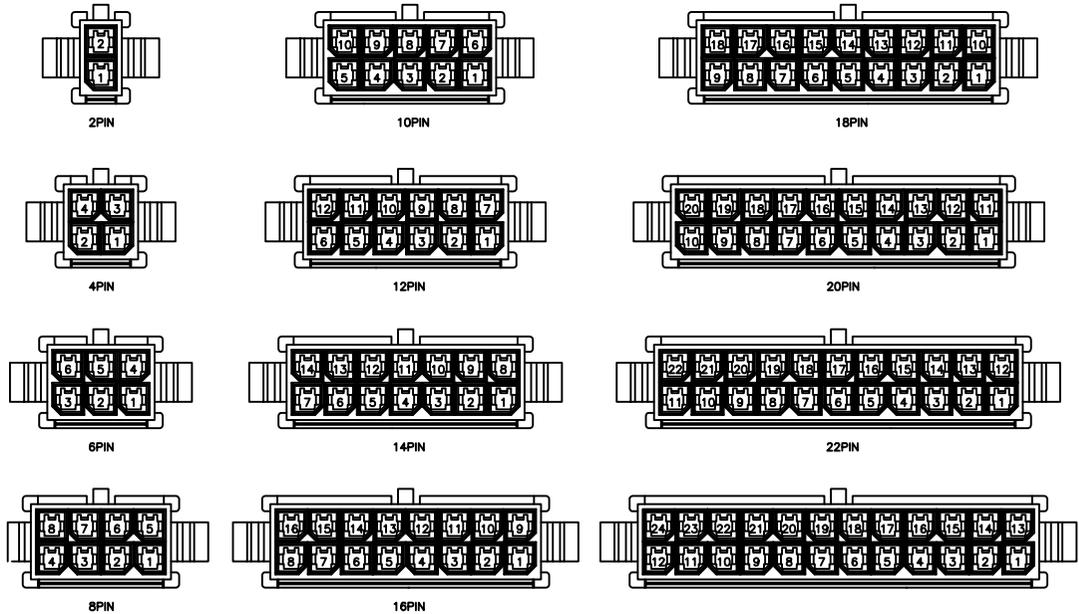

2~24PIN 防呆圖

RoHS Compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance

X. ± 0.5	DRAWN Annie	DATE 10-28-19'	NO. T230
.X ± 0.3			
.XX ± 0.2	CHECK Annie	DATE 10-28-19'	PART NO. WRGD-H300XXXBAA-H-F2
.XXX ± 0.1			
角度 ± 5°	APPROVED Tom	DATE 10-28-19'	CUSTOMER NO.

TITLE

PH3.0 Double Row Power Plug Housing

REV.	UNIT	SCALE	
A	mm	1:1	