
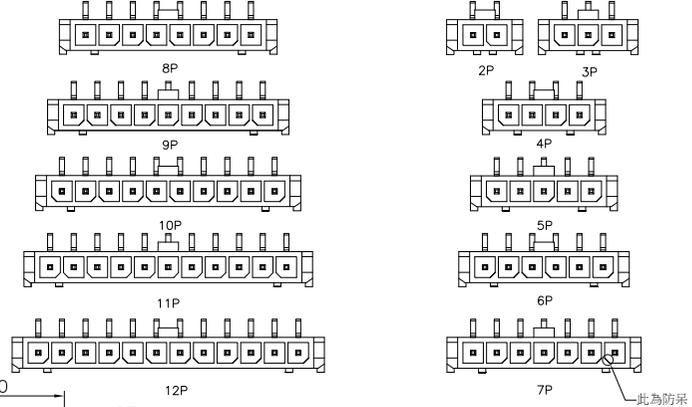
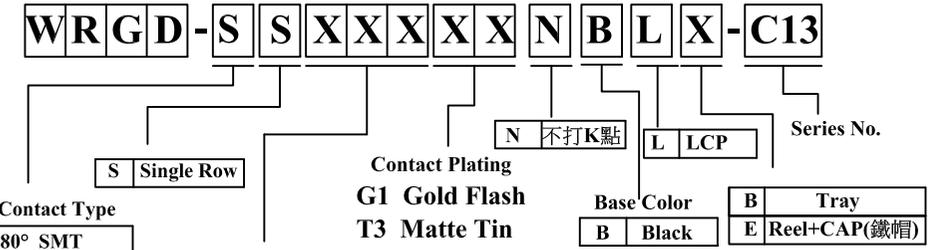
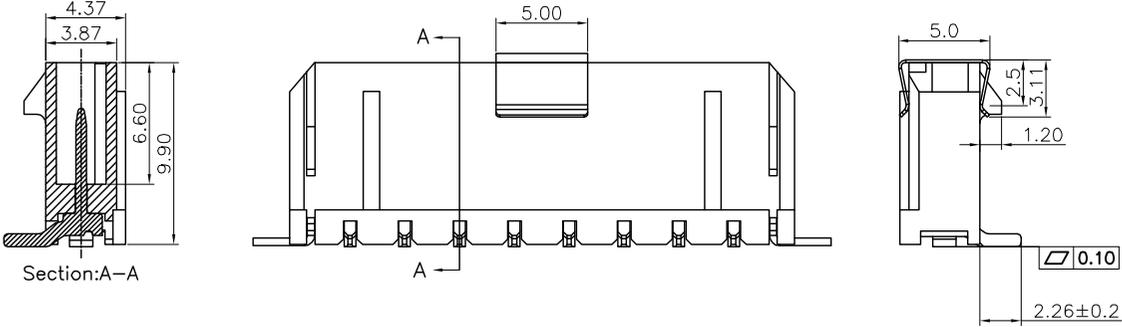



REV.	DESCRIPTION	DATE
A	New Drawing	2021/06/11
B	移除管裝	2021/06/16
C	修改電鍍為霧錫	2021/07/13
D	變更工作溫度	2022/07/29

Specifications:
 Current rating:5.0Amps
 Voltage rating:250V AC,DC
 Contact resistance:10mohm Max
 Insulation resistance:1,000Mohm min.
 Withstanding voltage:1,500V AC;DC
 Operating Temperature range:-40°C ~ +105°C

Materials:
 Insulator:High Temp.Plastic(LCP UL94V-0)
 Color:Black
 Terminal:Copper Alloy
 Plating:Gold or Tin Plated
 Packing:300Pcs/Reel

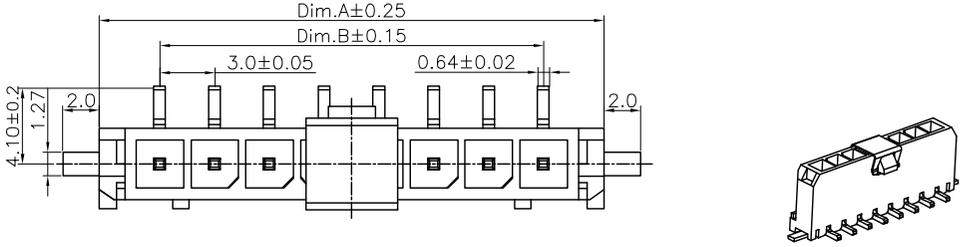

Wafer:WRGD-SSXXXXXXNBLX-C13
 Housing:WRGD-H300XXXBAA-C13
 Terminal:CU-PT2-C13

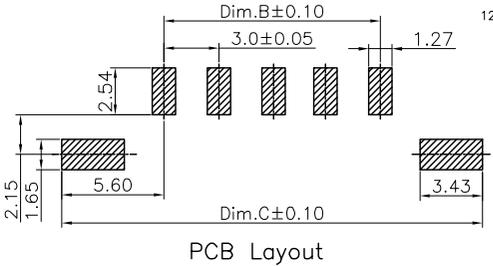

Positions	Dimension			Positions	Dimension		
	A	B	C		A	B	C
2	9.65	3.00	14.20	8	27.65	21.00	32.20
3	12.65	6.00	17.20	9	30.65	24.00	35.20
4	15.65	9.00	20.20	10	33.65	27.00	38.20
5	18.65	12.00	23.20	11	36.65	30.00	41.20
6	21.65	15.00	26.20	12	39.65	33.00	44.20
7	24.65	18.00	29.20				


RoHS Compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE	PH3.0 Wafer Single Row SMT	
X. ± 0.5		DRAWN	DATE	NO.
.X ± 0.3		Jacky	07-29-21'	T230
.XX ± 0.2		CHECK	DATE	PART NO.
.XXX ± 0.1		Tom	07-29-21'	WRGD-SSXXXXXXNBLX-C13
角度	± 5°	APPROVED	DATE	CUSTOMER NO.
		Tom	07-29-21'	




REV.	UNIT	SCALE	
D	mm	1:1	

REV.	DESCRIPTION	DATE
A	New Drawing	2021/06/11
B	移除管裝	2021/06/16

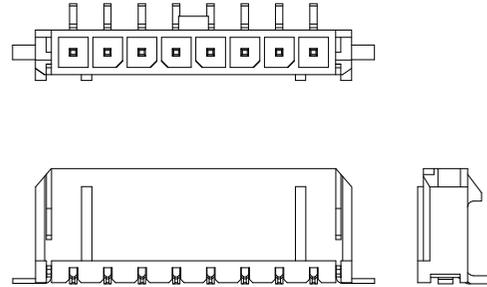

Note:
 1.Dimension
 Tray Size:260(L)x190(W)x12.0(H) (mm)
 Carton Size:400X280X280(mm)
 2.Quantity:
 XX Pcs/Tray
 44 Trays/Carton

Pin.	Pcs/Tray	Tray/Carton	Pcs/Carton
2	120	44	5280
3	100	44	4400
4	90	44	3960
5	80	44	3520
6	70	44	3080
7	70	44	3080
8	60	44	2640
9	60	44	2640
10	50	44	2200
11	50	44	2200
12	40	44	1760

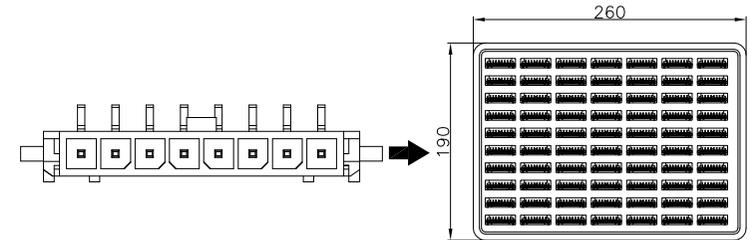

竣豪電子股份有限公司
Superior Tech Co., Ltd.

REV.	UNIT	SCALE	
B	mm	1:1	

General Tolerance		TITLE		WRGD-SSXXXXXNBLX-C13 包裝圖	
X. ± 0.5		DRAWN		DATE	
.X ± 0.3		Jacky		06-16-21'	
.XX ± 0.2		CHECK		DATE	
.XXX ± 0.1		Tom		06-16-21'	
角度		APPROVED		DATE	
± 5°		Joe		06-16-21'	
				NO.	
				T230	
				PART NO.	
				WRGD-SSXXXXXNBLX-C13	
				CUSTOMER NO.	