


REV.	DESCRIPTION	DATE
A0	New Drawing	2009/06/12

LTR	Part Name	Material	Description	QTY
1	Housing	NY-6T UL94V-0	Initial : 100M Ohms Min. (型號:HTN FR52G30LXNC)	1
2	Contact	Brass	Current Rating : 1.0A Initial : 20m Ohms Max. Voltage Rating : 125V AC,DC	XX
3	Tab Solder	Brass	Nickel Plated	2

Temperature Rating : -25°C ~ +85°C .
Dielectric Withstanding Voltage : 250V AC/Min

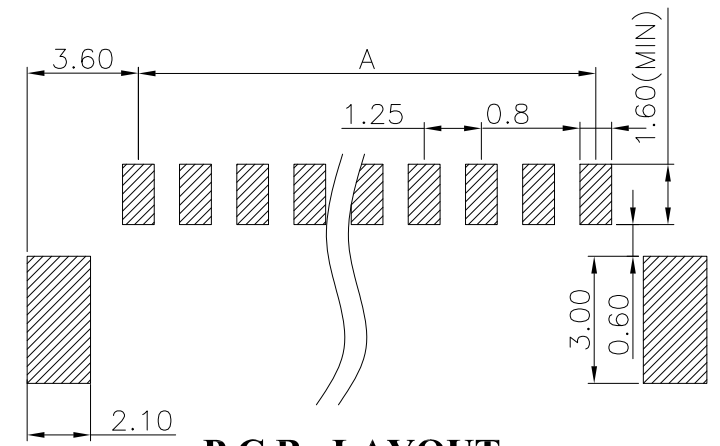

P.C.B LAYOUT

RoHS compliant

Contacts	A	B	C	D
2	1.25	3.05	4.25	7.65
3	2.50	4.30	5.50	8.90
4	3.75	5.55	6.75	10.15
5	5.00	6.80	8.00	11.40
6	6.25	8.05	9.25	12.65
7	7.50	9.30	10.50	13.90
8	8.75	10.56	11.75	15.15
9	10.00	11.80	13.00	16.40
10	11.25	13.05	14.25	17.65
11	12.50	14.30	15.50	18.90
12	13.75	15.55	16.75	20.15
13	15.00	16.80	18.00	21.40
14	16.25	18.05	19.25	22.65
15	17.50	19.30	20.50	23.90

WRBB - H S XXXX XX N N N X - T

- PCB Contact Type:** H Horizontal SMT
- Plastic Base:** S Single Row
- Number of Contact:** 02~15 contacts
- Contact Plating:** T2 Tin Plating, G1 Gold Flash
- Base Color:** N Natural
- Insulation:** N Without "K", N NY-6T
- Packing:** I REEL, C TUBE
- Series No.:** X - T

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE		WAFER PH1.25 Horizontal SMT	
X. ± 0.5		DRAWN		DATE	NO.
.X ± 0.3		SUNCUI		06-12-09'	T051
.XX ± 0.2		CHECK		DATE	PART NO.
.XXX ± 0.1		APPROVED		DATE	WRBB-HSXXXXXXNNNX-T
角度 ± 5°					CUSTOMER NO.

REV.	UNIT	SCALE	
A0	mm	2:1	