




| REV. | DESCRIPTION | DATE       |
|------|-------------|------------|
| A    | New Drawing | 2017/10/23 |

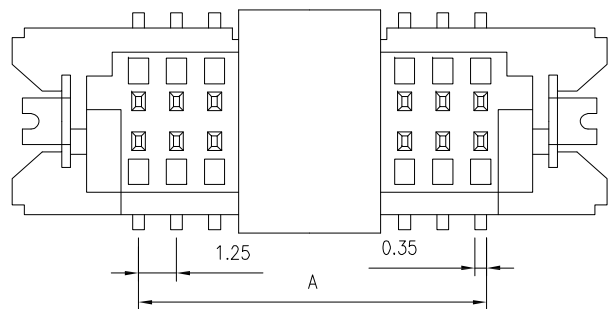


Wafer:WRBF-SDXXXG1WXBE-L  
Housing:WRBF-H125XXXNAA-L  
Terminal:CU-PT2-L

| LTR | Part Name | Material         | Description                                      | QTY |
|-----|-----------|------------------|--------------------------------------------------|-----|
| 1   | Housing   | NY-9T<br>UL94V-0 | Initial : 500M Ohms Min.                         | 1   |
| 2   | Contact   | Bronze           | Current Rating : 1.0A<br>Initial : 30m Ohms Max. | XX  |
| 3   | CAP       | NY-9T<br>UL94V-0 | Initial : 500M Ohms Min.                         | 1   |

Temperature Rating : -25°C ~ +85°C .  
Dielectric Withstanding Voltage : 500V AC/Min

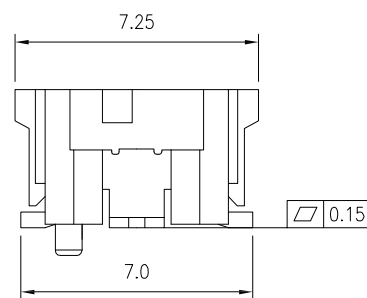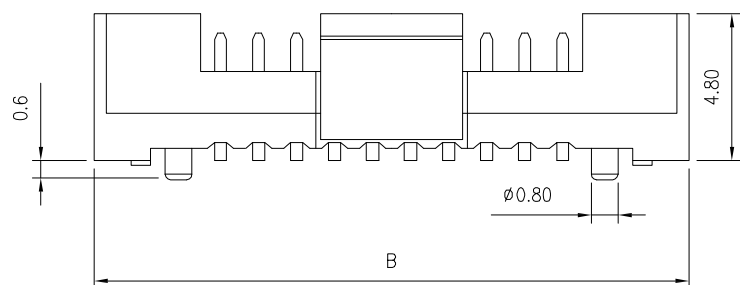

| CKT | Dimension mm |       |
|-----|--------------|-------|
|     | A            | B     |
| 10  | 5.00         | 12.50 |
| 20  | 11.25        | 18.75 |
| 30  | 17.50        | 25.00 |
| 40  | 23.75        | 31.25 |
| 50  | 30.00        | 37.50 |

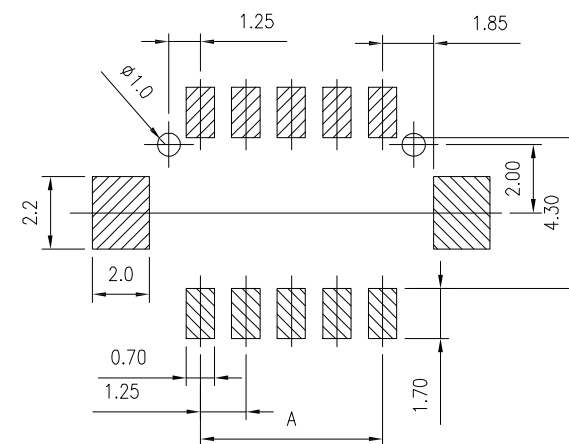

P.C.B LAYOUT

|                 |  |                                |  |            |   |            |   |            |
|-----------------|--|--------------------------------|--|------------|---|------------|---|------------|
| WRBF-S          |  | DXXX                           |  | G1         | W | X          | B | E-L        |
| Plastic Base    |  | Number of Contact              |  | Base Color |   | Packing    |   | Series No. |
| D Dual Row      |  | 10 to 50 contacts              |  | N Natural  |   | E Reel+Cap |   |            |
| Contact Plating |  | *Standard Plating : Gold Flash |  | A Beige    |   | Insulation |   |            |
| S SMT           |  | W With Peg                     |  | B NY-9T    |   |            |   |            |

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

| REV. | UNIT | SCALE |  |
|------|------|-------|--|
| A    | mm   | 1:1   |  |

| General Tolerance |      | TITLE         | PH1.25mm DUAL ROW WAFER-SMT TYPE |                    |
|-------------------|------|---------------|----------------------------------|--------------------|
| X. ± 0.5          |      | DRAWN<br>Andy | DATE                             | NO.                |
| .X ± 0.3          |      |               | 10-23-17'                        | D076               |
| .XX ± 0.2         |      | CHECK         | DATE                             | PART NO.           |
| .XXX ± 0.1        |      |               |                                  | WRBF-SDXXXG1WXBE-L |
| APPROVED          |      | DATE          | CUSTOMER NO.                     |                    |
| 角度                | ± 5° |               |                                  |                    |

(Q2-R03-01A) ST-R05-07