






REV.	DESCRIPTION	DATE
A	New Drawing	2022/03/04

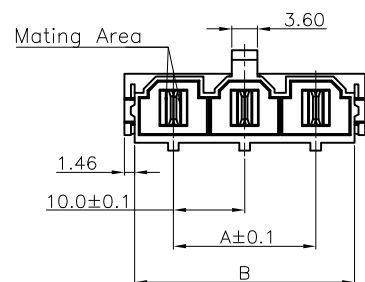


2 PIN



4 PIN





5 PIN



6 PIN

Specifications:
 Current Rating:48A max.
 Voltage Rating:600V
 Contact Resistance:1.5m ohm. Max.
 Insulation Resistance:1000M ohm. Min.
 Withstanding Voltage:2200V AC For One Minute
 Operating Temperature Range:-40°C To +105°C
 Materials:
 Insulator:High Temp. Plastic(Nylon9T UL94V-0)
 Insulator Color:Black
 Contact:Brass
 Plating:Tin Plated

Wafer:WRSD-DSXXXT2XNBBB-C01
 Housing:WRSD-H1000XXXBAA-C01
 Terminal:CU-BXX-C01

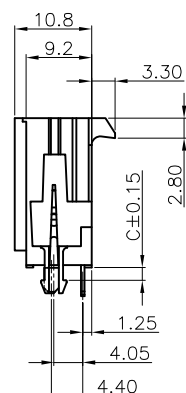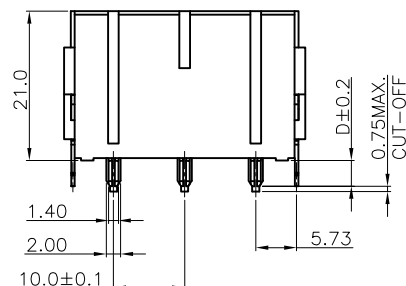


Dimension:


Pin No	Dim A	Dim B
02	—	20.90
03	20.0	30.90
04	30.0	40.90
05	40.0	50.90
06	50.0	60.90

Dip Dimension:

PART NO	Dim C	Dim D
A	1.80	3.50
B	2.60	5.10
C	3.40	5.10
D	6.58	8.30

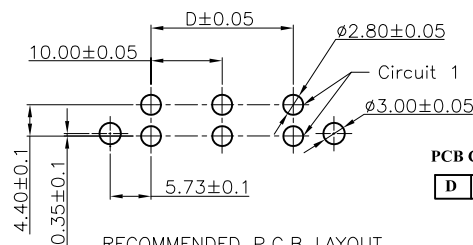

RECOMMENDED P.C.B LAYOUT

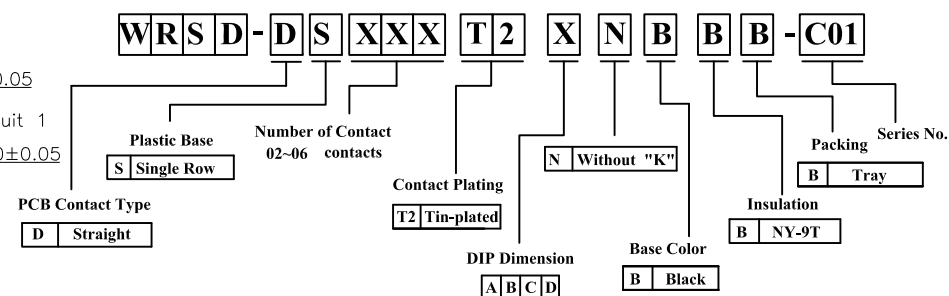

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

REV.	UNIT	SCALE	
A	mm	1:1	

General Tolerance		TITLE	WAFER PH 10.0 , DIP	
X. ± 0.5		DRAWN Jacky	DATE	NO.
.X ± 0.3			03-04-22'	T230
.XX ± 0.2		CHECK Tom	DATE	PART NO.
.XXX ± 0.1			03-04-22'	WRSD-DSXXXT2XNBBB-C01
角度 ± 5°		APPROVED Tom	DATE	CUSTOMER NO.
			03-04-22'	

(Q2-R03-01A) ST-R05-07