


REV.	DESCRIPTION	DATE
A0	New Drawing	2009/06/16
B	New Drawing	2016/03/03

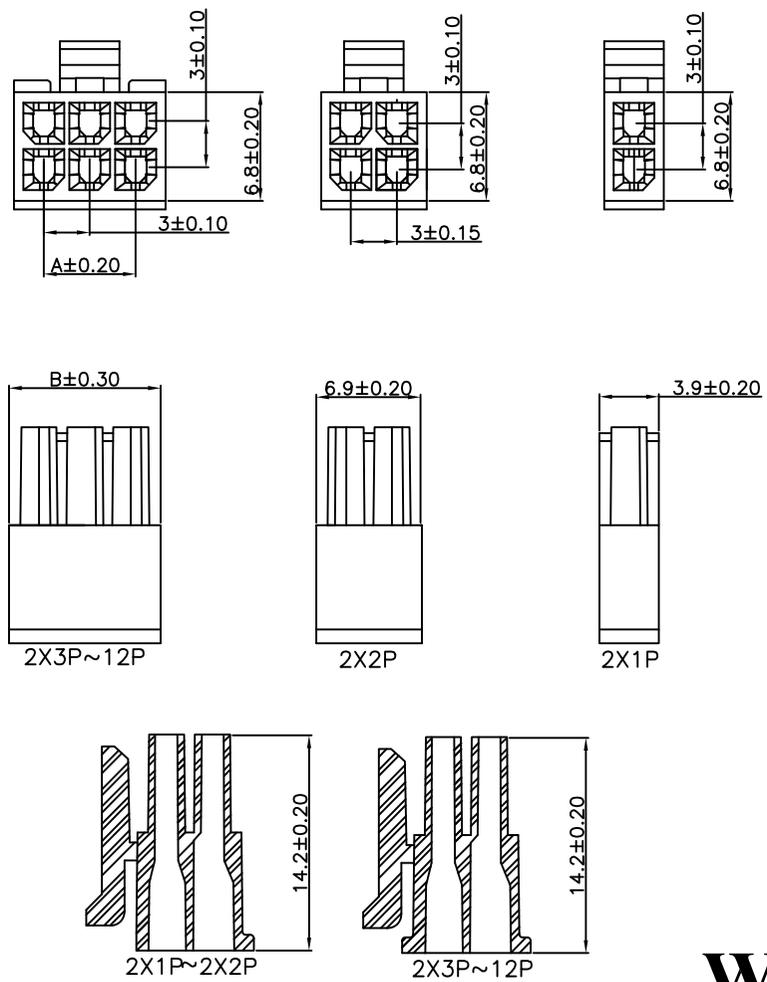

Specifications

Current Rating: 5A AC, DC  
Voltage Rating: 250V AC Maximum  
Operating Temp: -25°C ~ +85°C  
Contact Resistance: 10mΩ Max  
Insulation Resistance: 1000mΩ Min  
Dielectric Withstanding Voltage: 1500V AC,DC Min  
Material: Nylon66 UL94V-0

Poles	Dimension mm (in.)	
	A	B
2	—	3.9
4	3.0	6.9
6	6.0	9.9
8	9.0	12.9
10	12.0	15.9
12	15.0	18.9
14	18.0	21.9
16	21.0	24.9
18	24.0	27.9
20	27.0	30.9
22	30.0	33.9
24	33.0	36.9

# WRGDXXXBOHN


RoHS compliant

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**


General Tolerance X. ± 0.5 .X ± 0.3 .XX ± 0.2 .XXX ± 0.1 角度 ± 5°	TITLE	Micro fit 3.0mm Wire-to-Board Housing		
	DRAWN	DATE	NO.	
	CHECK	DATE	PART NO.	
	APPROVED	DATE	CUSTOMER NO.	

REV.	UNIT	SCALE	
A0	mm	2:1	


REV.	DESCRIPTION	DATE
A	New Drawing	2016/03/07




02P




04P




06P




08P




10P




12P

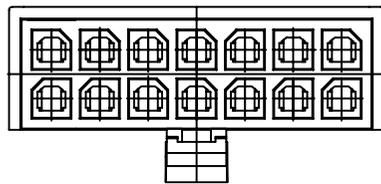


14P

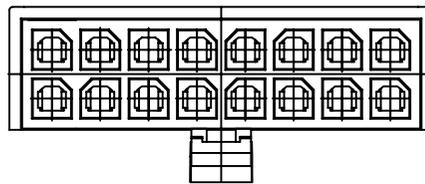


16P

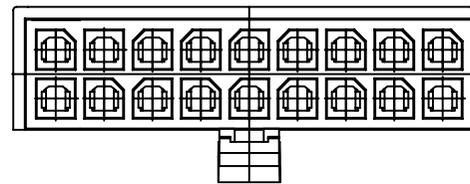


18P

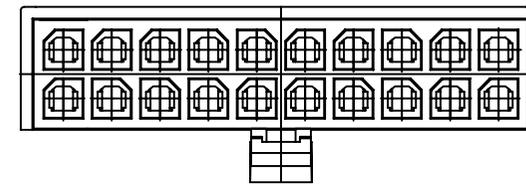

20P

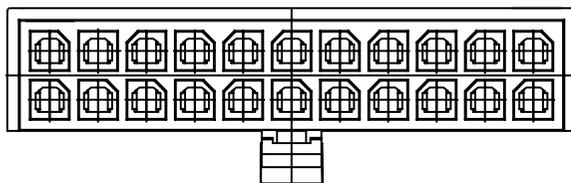

22P

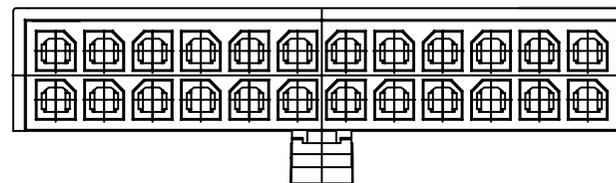

24P

**WRGDXXXBOHN**

RoHS compliant

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

<b>General Tolerance</b>		<b>TITLE</b> Micro fit 3.0mm Wire-to-Board Housing	
X. ± 0.5	<b>DRAWN</b>	<b>DATE</b>	<b>NO.</b>
.X ± 0.3	Lu Xiao	03-03-16	T051
.XX ± 0.2	<b>CHECK</b>	<b>DATE</b>	<b>PART NO.</b>
.XXX ± 0.1	<b>APPROVED</b>	<b>DATE</b>	WRGDXXXBOHN
角度 ± 5°			<b>CUSTOMER NO.</b>

<b>REV.</b>	<b>UNIT</b>	<b>SCALE</b>	
A	mm	2:1	