
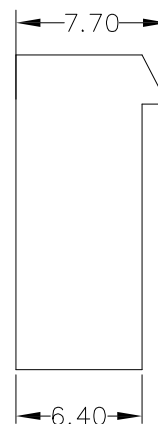
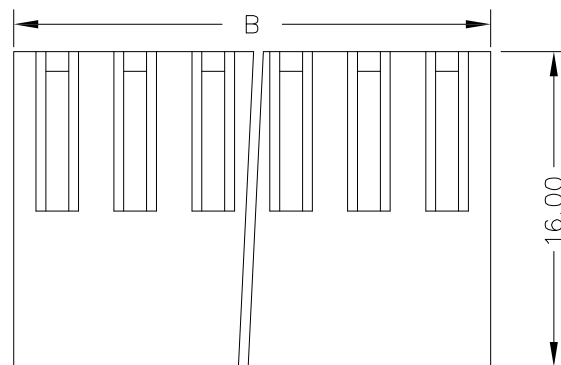


REV.	DESCRIPTION	DATE
A	New Drawing	2009/05/22

SPECIFICATIONS

Electrical
 Current Rating :5A AC,DC
 Voltage Rating :250V AC,DC
 Operating Temp:-25°C~+85°C
 Insulation Resistance:1000mΩ/min.
 Dielectric Withstanding Voltage:1500V AC/min
 Contact Resistance:10mΩ/max.

Material
 Housing: Nylon66 UL94V-2

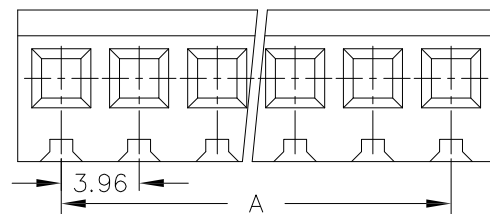

Poles	Dimension mm		Part No.
	A	B	
2	3.96	8.45	WRJA-H-02
3	7.92	12.39	WRJA-H-03
4	11.88	16.35	WRJA-H-04
5	15.84	20.31	WRJA-H-05
6	19.80	24.27	WRJA-H-06
7	23.76	28.23	WRJA-H-07
8	27.72	32.19	WRJA-H-08
9	31.68	36.15	WRJA-H-09
10	35.64	40.11	WRJA-H-10
11	39.60	44.07	WRJA-H-11
12	43.56	48.03	WRJA-H-12
13	47.52	51.99	WRJA-H-13
14	51.48	55.95	WRJA-H-14
15	55.44	59.91	WRJA-H-15
16	59.40	63.87	WRJA-H-16
17	63.36	67.83	WRJA-H-17
18	67.32	71.79	WRJA-H-18
20	75.24	79.71	WRJA-H-20

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

REV.	UNIT	SCALE		General Tolerance	TITLE	For Wafer3.96(WRJA)Housing	
				X. ± 0.5	DRAWN	DATE	NO.
				.X ± 0.3	SUNCUI	05-22-09'	T003
				.XX ± 0.2	CHECK	DATE	PART NO.
				.XXX ± 0.1	APPROVED	DATE	CUSTOMER NO.
A	mm	2:1		角度	± 5°		