
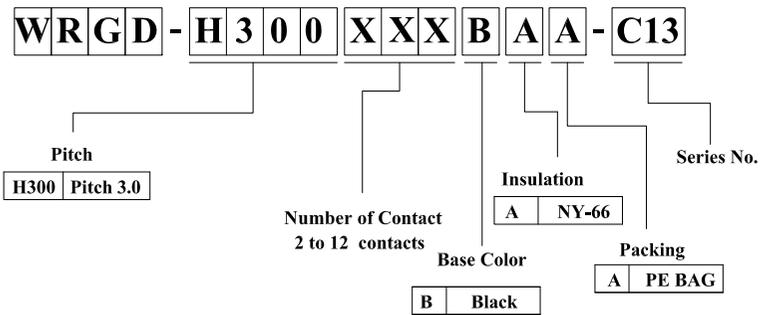
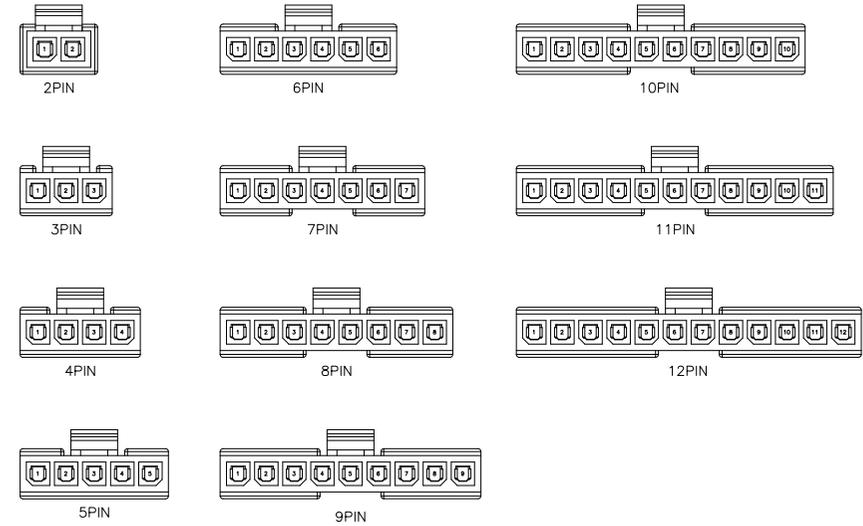


REV.	DESCRIPTION	DATE
A	New Drawing	2021/06/18
B	更正塑膠材質	2021/07/12

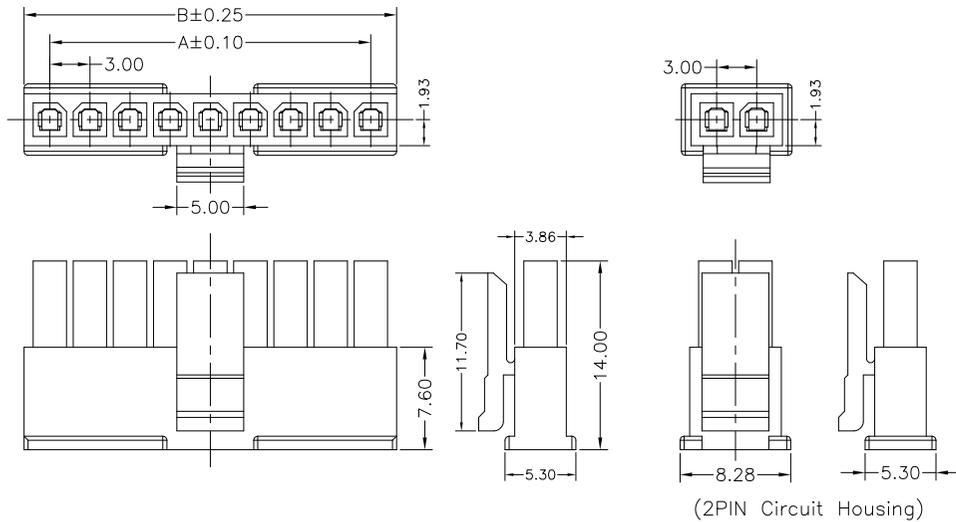

Specifications:
 Current Rating:5.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:10m ohm. Max.
 Insulation Resistance:1000M ohm. Min.
 Withstanding Voltage:1.500V AC/Minute
 Operating Temperature Range:-40°C~+125°C
 Application Wire:AWG #20~#24

Material and Finish
 Insulator:Nylon66 UL94V-0
 Color:Black

Wafer:WRGD-SSXXXXXNBLX-C13
Housing:WRGD-H300XXXBAA-C13
Terminal:CU-PT2-C13

Dimension:

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
2	3.00	See detail	8	21.00	24.85
3	6.00	9.85	9	24.00	27.85
4	9.00	12.85	10	27.00	30.85
5	12.00	15.85	11	30.00	33.85
6	15.00	18.85	12	33.00	36.85
7	18.00	21.85			

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance

X. ± 0.5
.X ± 0.3
.XX ± 0.2
.XXX ± 0.1
角度 ± 5°

TITLE


DRAWN	Jacky
CHECK	Tom
APPROVED	Joe

PH3.0mm Housing

DATE	07-12-21'
DATE	07-12-21'
DATE	07-12-21'

NO.	T230
PART NO.	WRGD-H300XXXBAA-C13
CUSTOMER NO.	

REV.	UNIT	SCALE
B	mm	1:1



(Q2-R03-01A)ST-R05-07