

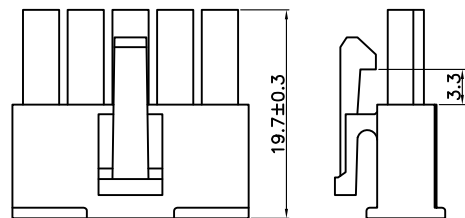

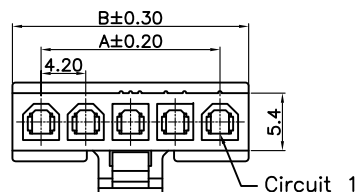
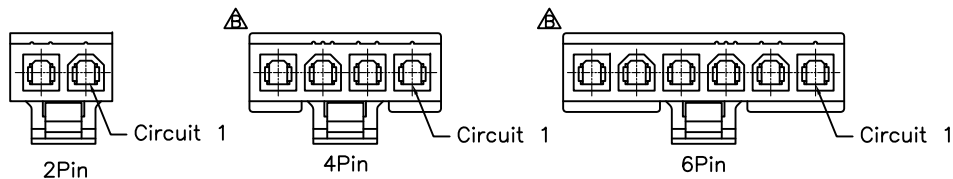


REV.	DESCRIPTION	DATE
A	New Drawing	2019/10/24




02P&04~06P



Specifications:  
 Current Rating:8.0A AC/DC  
 Voltage Rating:500V AC/DC  
 Insulation Resistance:1,000M Ohm. Min.  
 Withstanding Voltage:1500V AC/Minute  
 Operating Temperature Range:-25°C ~ +85°C  
 Material And Finish:  
 Insulator:Nylon 66 (UL94V-2)  
 Insulator Color:Transparent White

Part No.	Dim. A	Dim. B
02	4.2	9.8
03	8.4	14.0
04	12.6	18.2
05	16.8	22.4
06	21.0	26.6

**WRKD-H420XXXTAA-H-B1**

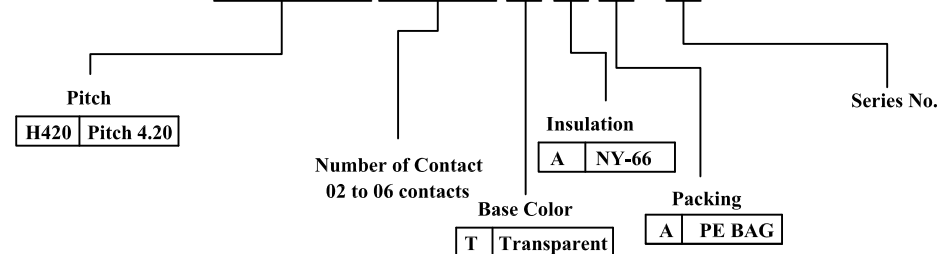

Housing:WRKD-H420XXXTAA-H-B1  
 Housing:WRKD-H420XXXWAA-H-B2  
 Terminal:CU-XT2-H-BX

Housing:WRKD-H420XXXTAA-H-C1  
 Housing:WRKD-H420XXXWAA-H-C2  
 Terminal:CU-XT2-H-CX

Wafer:WRKD-DSXXXT2NWAA-H  
 Wafer:WRKD-DDXXXT2NWAA-H  
 Wafer:WRKD-RSXXXT2NWAA-H  
 Wafer:WRKD-RDXXXT2NXAA-H

RoHS compliant

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

General Tolerance		TITLE	PH4.20 Receptacle Housing Single Row	
X. ± 0.5		DRAWN	DATE	NO.
.X ± 0.3		Annie	10-24-19'	T230
.XX ± 0.2		CHECK	DATE	PART NO.
.XXX ± 0.1		Annie	10-24-19'	WRKD-H420XXXTAA-H-B1
角度 ± 5°		APPROVED	DATE	CUSTOMER NO.
		Tom	10-24-19'	

REV.	UNIT	SCALE	
A	mm	1:1	