






REV.	DESCRIPTION	DATE
A	New Drawing	2019/10/24

Specifications:

Current Rating:9.0A AC/DC  
Voltage Rating:600V AC/DC  
Contact Resistance:10m Ohm. Max.  
Insulation Resistance:1,000M Ohm. Min.  
Withstanding Voltage:1500V AC/Minute  
Operating Temperature Range:-40°C ~ +105°C

Material And Finish:

Insulator:Nylon 66 (UL94V-0)  
Color:White

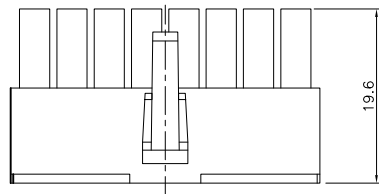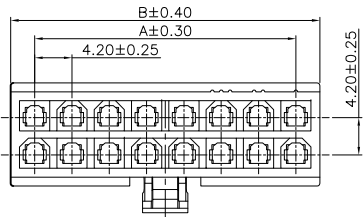

Dimension:

Circuits	DIM.A	DIM.B	Circuits	DIM.A	DIM.B
2		5.40	14	25.20	30.60
4	4.20	9.60	16	29.40	34.80
6	8.40	13.80	18	33.60	39.00
8	12.60	18.00	20	37.80	43.20
10	16.80	22.20	22	42.00	47.40
12	21.00	26.40	24	46.20	51.60

**WRKD - H420 XXX WAA - H - B2**

Pitch  
**H420 Pitch 4.20**













Number of Contact  
02 to 24 contacts

Insulation  
**A NY-66**

Base Color  
**W White**

Packing  
**A PE BAG**

Series No.



2~24Pin 防呆示意图 (Ref.)

RoHS compliant

Housing:WRKD-H420XXXTAA-H-B1  
Housing:WRKD-H420XXXWAA-H-B2  
Terminal:CU-XT2-H-BX

Housing:WRKD-H420XXXTAA-H-C1  
Housing:WRKD-H420XXXWAA-H-C2  
Terminal:CU-XT2-H-CX

Wafer:WRKD-DSXXXT2NWAA-H  
Wafer:WRKD-DDXXXT2NWAA-H  
Wafer:WRKD-RSXXXT2NWAA-H  
Wafer:WRKD-RDXXXT2NXAA-H

竣豪電子股份有限公司  
**Superior Tech Co., Ltd.**

General Tolerance

X. ± 0.5	ANGLE
.X ± 0.3	
.XX ± 0.2	角 度
.XXX ± 0.1	
± 5°	

TITLE

**DRAWN**  
Annie  
**CHECK**  
Annie  
**APPROVED**  
Tom

**PH4.20 Receptacle Housing Double Row**

**DATE**  
10-24-19'  
**DATE**  
10-24-19'  
**DATE**  
10-24-19'

**NO.**  
**T230**  
**PART NO.**  
**WRKD-H420XXXWAA-H-B2**  
**CUSTOMER NO.**

REV. **A** UNIT **mm** SCALE **1:1**

