


P. C. board hole dimensions

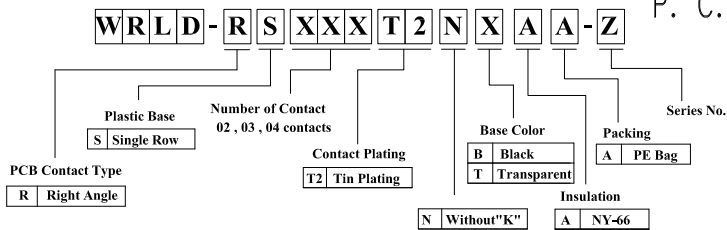

REV.	DESCRIPTION	DATE
A	New Drawing	2012/11/23

Features:

- 2 ~ 4 circuits available
- Plastic: UL 94V-2 nylon 66
- Pin: Tin-plated phosphor bronze, 0.25mm thickness
- Mates with housing
- Mates with header
- Mates with connector

Specification:

- Current rating: 6.5A
- Voltage rating: 250V AC (R.M.S.)
- Contact resistance: 10mΩ Max.
- Insulation resistance: 500MΩ Min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance		TITLE	Wafer PH5.08mm Right Angle Header	
X. ± 0.5	.X ± 0.3	DRAWN YuHongYu	DATE 11-23-12'	NO. T062
.XX ± 0.2	.XXX ± 0.1	CHECK	DATE	PART NO. WRLD-RSXXXT2NXAA-Z
角度	± 5°	APPROVED	DATE	CUSTOMER NO.

REV.	UNIT	SCALE
A	mm	1:1

