


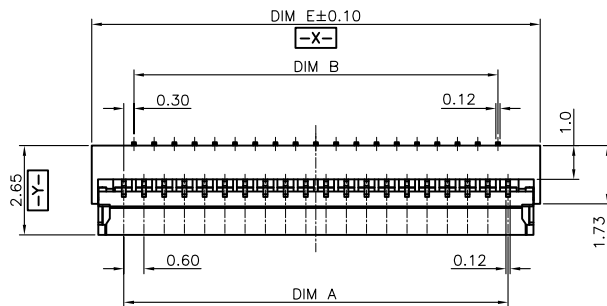
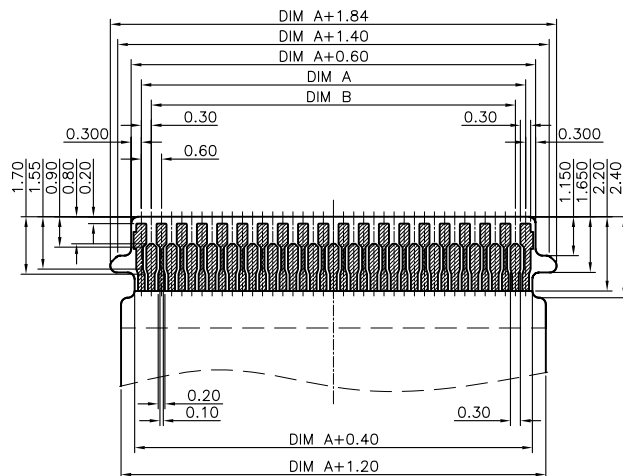





REV.	DESCRIPTION	DATE
A	New Drawing	2019/12/17



SECTION A-A
SCALE 1:1

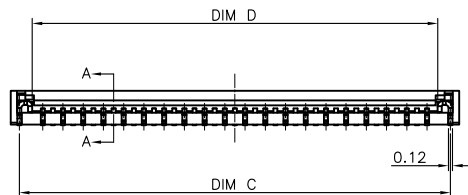

RECOMMENDED FPC/FFC DIMENSION

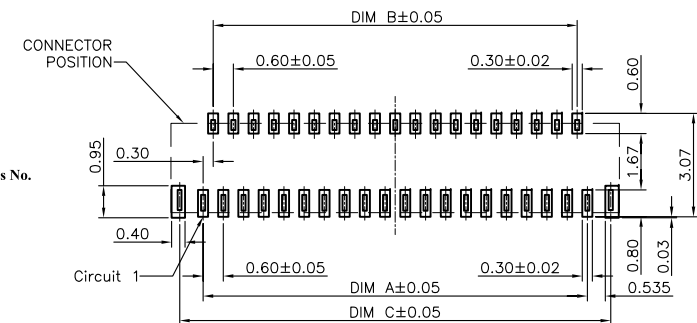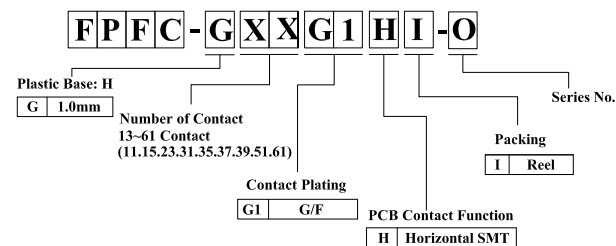

RECOMMENDED P.C.B PATTERN LAYOUT

Note:

1. Material:

1.1 Housing: thermoplastic high temp.
UL94V-0; Color: natural/black.

1.2 Latch: thermoplastic high temp.
UL94V-0; Color: black.

1.3 Terminal: copper alloy.

1.4 Fitting Nail: copper alloy.

2. Finish:

2.1 Terminal:

Underplating: Gold flash overall.

2.2 Fitting Nail:

Underplating: matt Tin overall.

3. Product must comply HF RoHS specification.

CKT	DIMA	DIMB	DIMC	DIMD	DIME
13	3.60	3.00	4.99	4.23	5.50
15	4.20	3.60	5.59	4.83	6.10
17	4.80	4.20	6.19	5.43	6.70
19	5.40	4.80	6.79	6.03	7.30
21	6.00	5.40	7.39	6.63	7.90
23	6.60	6.00	7.99	7.23	8.50
25	7.20	6.60	8.59	7.83	9.10
27	7.80	7.20	9.19	8.43	9.70
29	8.40	7.80	9.79	9.03	10.30
31	9.00	8.40	10.39	9.63	10.90
33	9.60	9.00	10.99	10.23	11.50
35	10.20	9.60	11.59	10.83	12.10
37	10.80	10.20	12.19	11.43	12.70
39	11.40	10.80	12.79	12.03	13.30
41	12.00	11.40	13.39	12.63	13.90
43	12.60	12.00	13.99	13.23	14.50
45	13.20	12.60	14.59	13.83	15.10
47	13.80	13.20	15.19	14.43	15.70
49	14.40	13.80	15.79	15.03	16.30
51	15.00	14.40	16.39	15.63	16.90
53	15.60	15.00	16.99	16.23	17.50
55	16.20	15.60	17.59	16.83	18.10
57	16.80	16.20	18.19	17.43	18.70
59	17.40	16.80	18.79	18.03	19.30
61	18.00	17.40	19.39	18.63	19.90

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

竣豪電子股份有限公司 Superior Tech Co., Ltd.				General Tolerance		TITLE	FPC PH0.3 H1.0 ZIF Easy-on R/A SMT		
				X. ± 0.5		DRAWN		DATE	NO.
				.X ± 0.3		Annie		12-17-19'	T170
				.XX ± 0.2		CHECK		DATE	PART NO.
				.XXX ± 0.1		Annie		12-17-19'	FPFC-GXXG1HI-O
REV.	UNIT	SCALE		角度	± 5°	APPROVED	DATE	CUSTOMER NO.	
A	mm	1:1			Tom	12-17-19'	1/2		

REV.	UNIT	SCALE	
A	mm	1:1	

FPFC-GXXG1HI-O

1/2

