

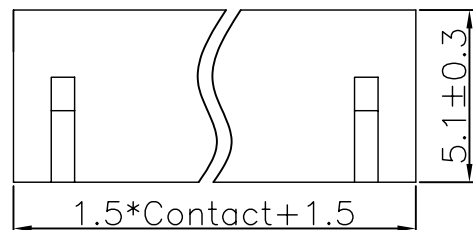
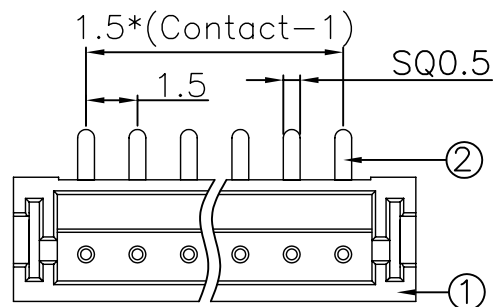


REV.	DESCRIPTION	DATE
A0	New Drawing	2008/07/28

LTR	Part Name	Material	Description	QTY
1	Housing	NY-6T UL94V-0	Initial : 500M Ohms Min.	1
2	Contact	Brass C2680	Current Rating : 1.0A Initial : 20m Ohms Max.	XX
Temperature Rating : -25°C ~ +85°C . Dielectric Withstanding Voltage : 500V AC/Min				

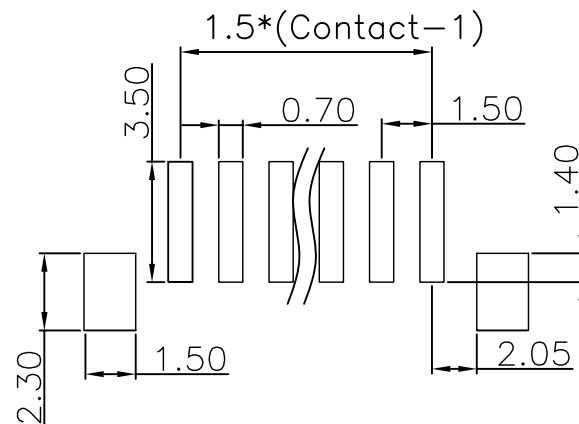

P.C.B LAYOUT

RoHS compliant

竣豪電子股份有限公司 Superior Tech Co., Ltd.				General Tolerance		TITLE	1.50mm Wire-to-Board Header SMD 180° TYPE			
				X. ± 0.5		DRAWN SUNCUI		DATE	NO.	
				.X ± 0.3				07-28-08'	D009	
				.XX ± 0.2		CHECK		DATE	PART NO.	
				.XXX ± 0.1				WRCA-SSXXXT2NNNA-H		
REV.	A0	UNIT	mm	SCALE	4:1		APPROVED		DATE	CUSTOMER NO.