

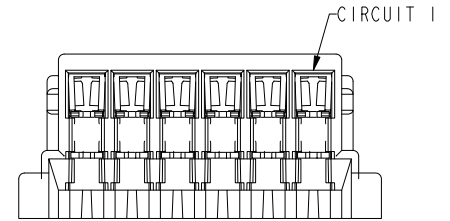

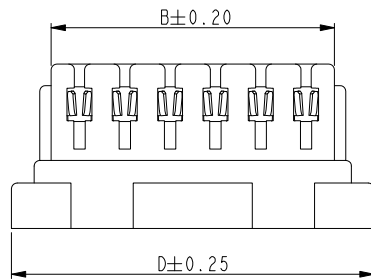

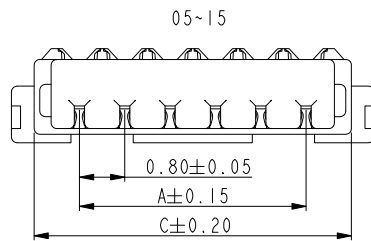



| REV. | DESCRIPTION | DATE |
|------|-------------|------------|
| A | New Drawing | 2017/11/30 |
| B | 圖面更新 | 2023/11/20 |




APPLICABLE WIRE: AWG #32, #34, #36

| PIN | A | B | C | D |
|-----|-------|-------|-------|-------|
| 02 | 0.80 | 1.80 | 2.40 | 3.20 |
| 03 | 1.60 | 2.60 | 3.20 | 4.00 |
| 04 | 2.40 | 3.40 | 4.00 | 4.80 |
| 05 | 3.20 | 4.20 | 4.80 | 5.60 |
| 06 | 4.00 | 5.00 | 5.60 | 6.40 |
| 07 | 4.80 | 5.80 | 6.40 | 7.20 |
| 08 | 5.60 | 6.60 | 7.20 | 8.00 |
| 09 | 6.40 | 7.40 | 8.00 | 8.80 |
| 10 | 7.20 | 8.20 | 8.80 | 9.60 |
| 11 | 8.00 | 9.00 | 9.60 | 10.40 |
| 12 | 8.80 | 9.80 | 10.40 | 11.20 |
| 13 | 9.60 | 10.60 | 11.20 | 12.00 |
| 14 | 10.40 | 11.40 | 12.00 | 12.80 |
| 15 | 11.20 | 12.20 | 12.80 | 13.60 |



| INDEX | PART NAME | MATERIAL | FINISH |
|-------|-----------|---------------------------------------|--|
| 1 | HOUSING | (HF) LCP, UL94-V0; COLOR: CREAM/BLACK | |
| 2 | TERMINAL | COPPER ALLOY; ±0.10mm | (1) TIN PLATED OVER NICKEL (2) GOLD FLASH PLATED ON CONTACT AREA, OVER NICKEL |

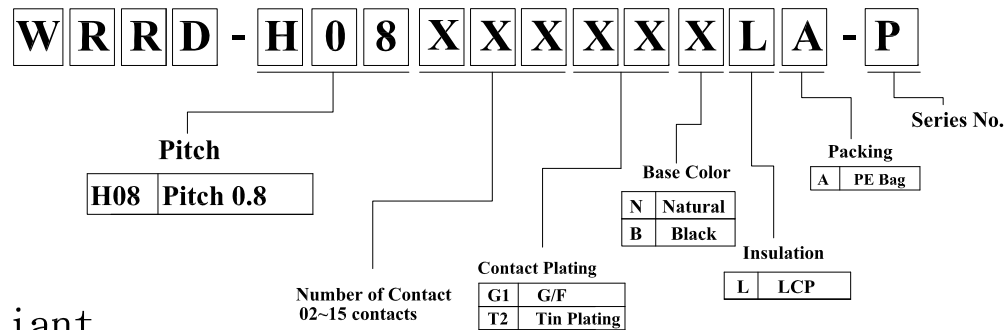

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.


| General Tolerance | TITLE | PH0.8mm Housing | |
|-------------------|----------|-----------------|----------------------|
| X. ± 0.5 | DRAWN | DATE | NO. |
| .X ± 0.3 | Jacky | 11-20-23' | T057 |
| .XX ± 0.2 | CHECK | DATE | PART NO. |
| .XXX ± 0.1 | Tom | 11-20-23' | WRRD-H08XXXXXXXXLA-P |
| 角度 ± 5° | APPROVED | DATE | CUSTOMER NO. |
| | Tom | 11-20-23' | |

| REV. | UNIT | SCALE | |
|------|------|-------|--|
| B | mm | 1:1 | |


(Q2-R03-01A) ST-R05-07

| REV. | DESCRIPTION | DATE |
|------|-------------|------------|
| A | New Drawing | 2023/11/20 |

02-13 PIN



CONNECTOR




BAG

| | |
|----------------------------|------------------------------|
| PIN, Q'TY/BAG, PE BAG DIM. | PIN, BAG/BC, PCS/BC |
| 02~15, 1,000 PCS/BAG | 02~15, 80 BAG, 80,000 PCS/BC |




LABEL

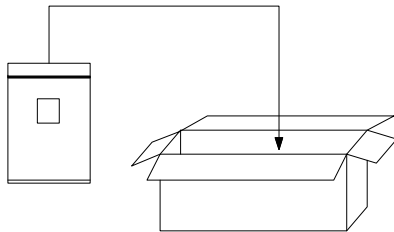


CARTON


14-15 PIN



CONNECTOR




BAG




(4 BAG/BOX)

BOX A



BOX B

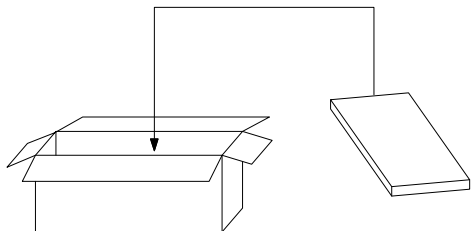

CARTON

RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

General Tolerance

| | | |
|------------|----|------|
| X. ± 0.5 | 角度 | ± 5° |
| .X ± 0.3 | | |
| .XX ± 0.2 | | |
| .XXX ± 0.1 | | |

TITLE

WRRD-H08XXXXXXXXLA-P 包裝圖

DRAWN

Janky

DATE

11-30-23'

NO.

T057

CHECK

Tom

DATE

11-20-23'

PART NO.

WRRD-H08XXXXXXXXLA-P

APPROVED

Tom

DATE


11-20-23'

CUSTOMER NO.

REV.
A

UNIT
mm

SCALE
1:1



(Q2-R03-01A) ST-R05-07